

RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free



FEATURES

- Low profile package
- Ideal for automated placement
- Guard Ring for over voltage protection
- Low forward voltage drop
- Component in accordance to RoHS 2002/95/EC

MECHANICAL DATA

- Case: Molded Plastic
- Epoxy: UL 94V-0 rate flame retardant
- Terminals: Lead Free Plating (Tin Finish).
Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Mounting position: Any
- Weight: 0.095 grams

SMB

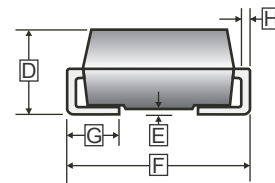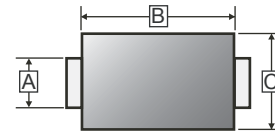

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	1.91	2.20	E	-	0.203
B	4.06	4.70	F	5.08	5.59
C	3.30	3.94	G	0.76	1.52
D	2.13	2.44	H	0.15	0.305

PACKAGE INFORMATION

Package	MPQ	Leader Size
SMB	3K	13 inch

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, de-rate current by 20%.)


Parameter	Symbol	Rating	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	20	V
Maximum RMS voltage	V_{RMS}	14	V
Maximum DC Blocking Voltage	V_{DC}	20	V
Maximum average forward rectified current	$I_{F(AV)}$	3	A
Peak Forward Current @ 8.3 ms Half Sine	I_{FSM}	150	A
Maximum Instantaneous Forward Voltage @ $I_F=3A$	V_F	0.42	V
Maximum DC Reverse Current At Rated DC Blocking ²	I_R	$T_A=25^\circ C$	0.1
		$T_A=100^\circ C$	10
Typical Junction Capacitance ¹	C_J	200	pF
Typical Thermal Resistance	$R_{\theta JL}$	25	°C/W
Typical Thermal Resistance	$R_{\theta JC}$	30	°C/W
Operating And Storage Temperature Range	T_J, T_{STG}	-55~150	°C

Note:


1. Measured at 1.0MHZ and applied reverse voltage of 4.0V DC.
2. Pulse test: 300µs pulse width, 1% duty cycle.

RATINGS AND CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

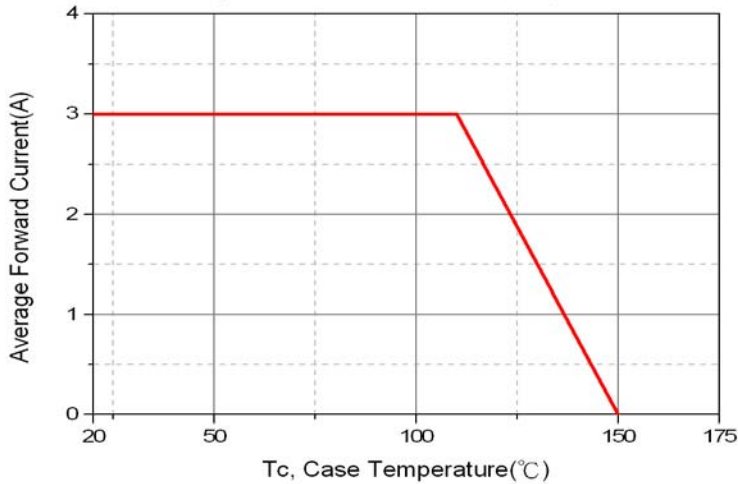


Typical Forward Characteristics

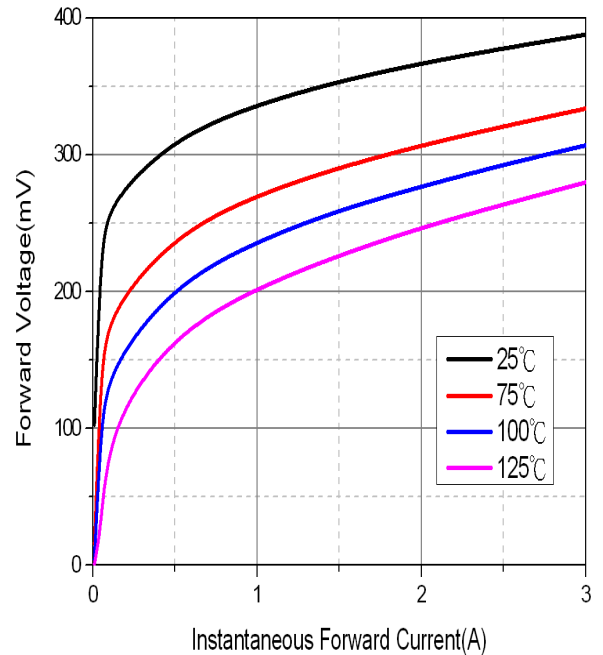

Typical Junction Capacitance

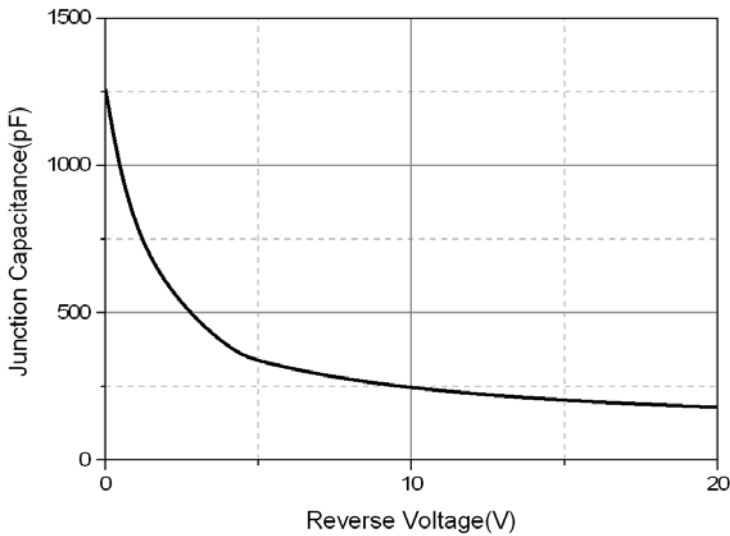

Typical Reverse Characteristics

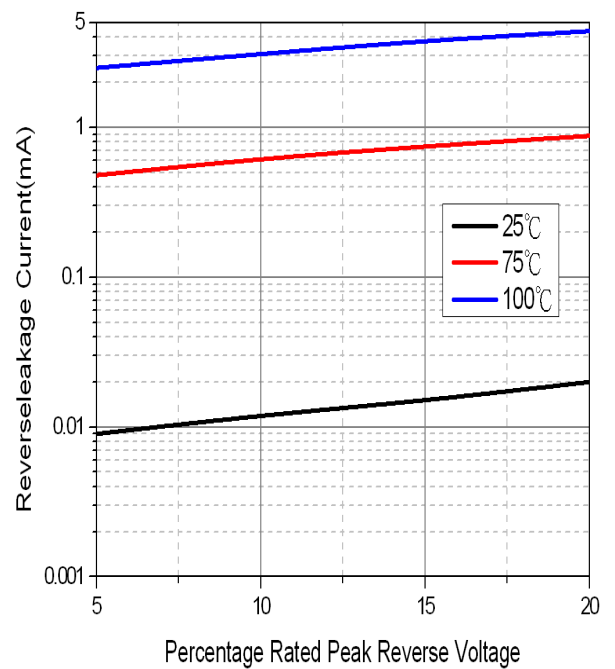

Maximum Non-Repetitive Forward Surge Current

