

RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free



FEATURES

- Schottky Barrier Chip
- High Thermal Reliability
- Patented Super Barrier Rectifier Technology
- High Forward Surge Capability
- Ultra Low Power Loss and High Efficiency
- Excellent High Temperature Stability
- Plastic Material-UL Flammability 94V-0

PACKAGE INFORMATION

Package	MPQ	Leader Size
TO-277D	5K	13 inch

TO-277D

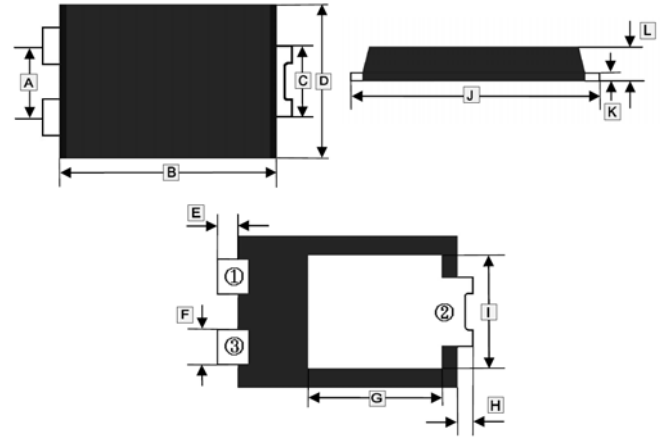

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	1.65	1.95	G	3.25	3.85
B	5.3	5.5	H	0.45	0.65
C	1.7	1.9	I	2.9	3.2
D	3.8	4.2	J	6.4	6.6
E	0.45	0.65	K	0.3	0.45
F	0.8	1.0	L	1.0	1.2

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

($T_A=25^\circ\text{C}$, unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load. For capacitive load, de-rate current by 20%.)

Parameter	Symbol	Rating	Unit
Maximum Peak Repetitive Reverse Voltage	V_{RRM}	150	V
Maximum Working Peak Reverse Voltage	V_{RWM}	150	V
Maximum DC Blocking Voltage	V_{DC}	150	V
Maximum RMS Rectified Voltage	V_{RMS}	105	V
Maximum Average Rectified Output Current ¹	I_O	10	A
Non-Repetitive Peak Forward Surge Current@ 8.3ms Single Half Sine-Wave, Superimposed on Rated Load (JEDEC method) ²	I_{FSM}	200	A
I^2t Rating for Fusing@ $t < 8.3\text{ms}$	I^2t	166	A^2S
Typical Thermal Resistance from Junction to Ambient	$R_{\theta JA}$	110	$^\circ\text{C} / \text{W}$
Typical Thermal Resistance from Junction to Lead	$R_{\theta JL}$	3.5	$^\circ\text{C} / \text{W}$
Operating Junction and Storage Temperature Range	T_J, T_{STG}	150, -55~150	$^\circ\text{C}$

Notes:


1. The data is tested on the condition that the ambient temperature is tested at a 9.5mm distance from the case.
2. FR-4 2oz 18.8mm × 14.4mm PCB with 5.6mm × 14.4mm copper pad.

ELECTRICAL CHARACTERISTICS


Parameter	Symbol	Typ.	Max.	Unit	Test Condition
Forward Voltage Drop	V_{FM}	0.5	-	V	$I_F=1\text{A}, T_A=25^\circ\text{C}$
		0.72	-		$I_F=5\text{A}, T_A=25^\circ\text{C}$
		0.79	0.83		$I_F=10\text{A}, T_A=25^\circ\text{C}$
Peak Reverse Current at Rated DC Blocking Voltage	I_R	-	0.3	mA	$T_A=25^\circ\text{C}$
		-	15		$T_A=100^\circ\text{C}$

CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

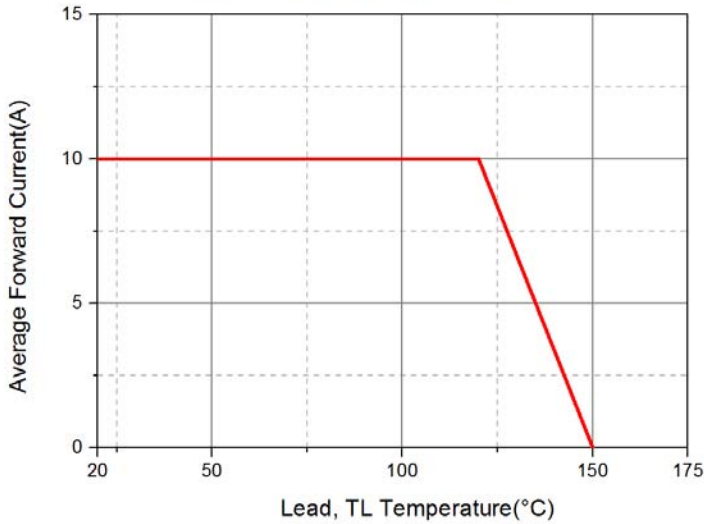


Typical Forward Characteristic

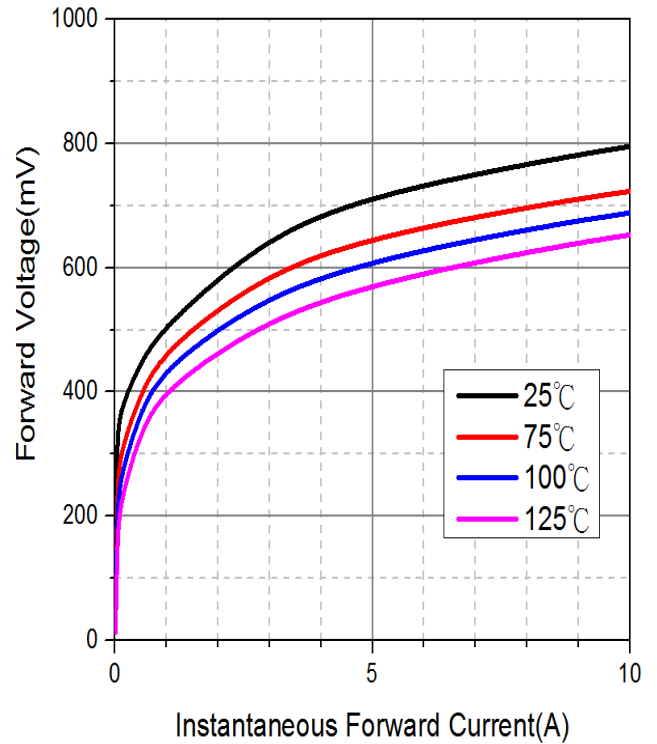

Typical Junction Capacitance

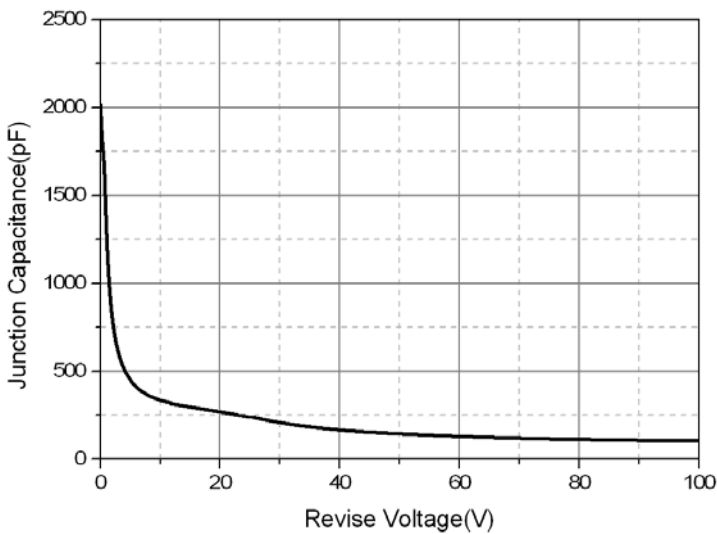

Typical Reverse Characteristic

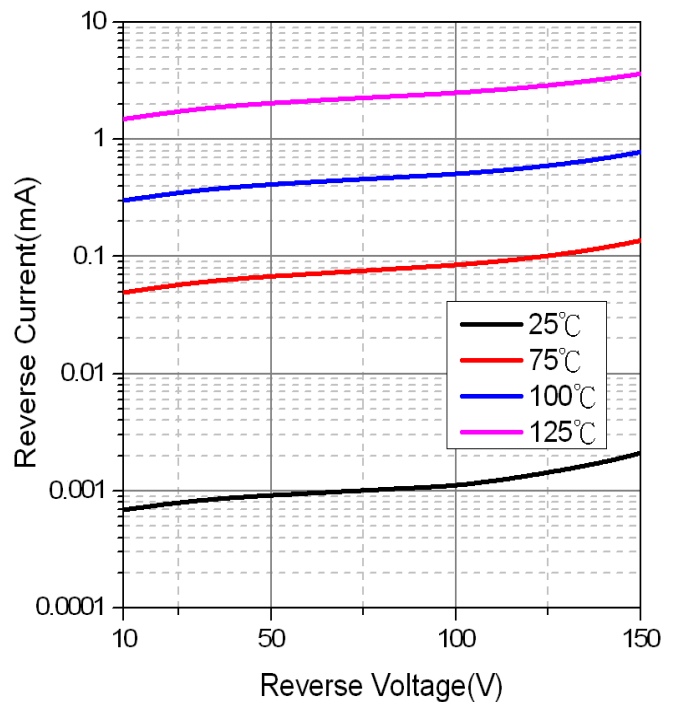

Maximum Non-Repetitive Forward Surge Current

