



RoHS Compliant Product
A suffix of "C" specifies halogen free

FEATURES

- Trench Barrier Schottky technology
- Low forward voltage drop
- Low reverse current
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction

MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Lead solderable per MIL-STD-202 method 208 guaranteed
- Polarity: As Marked
- Mounting position: Any
- Weight: 1.98 g (Approximate)

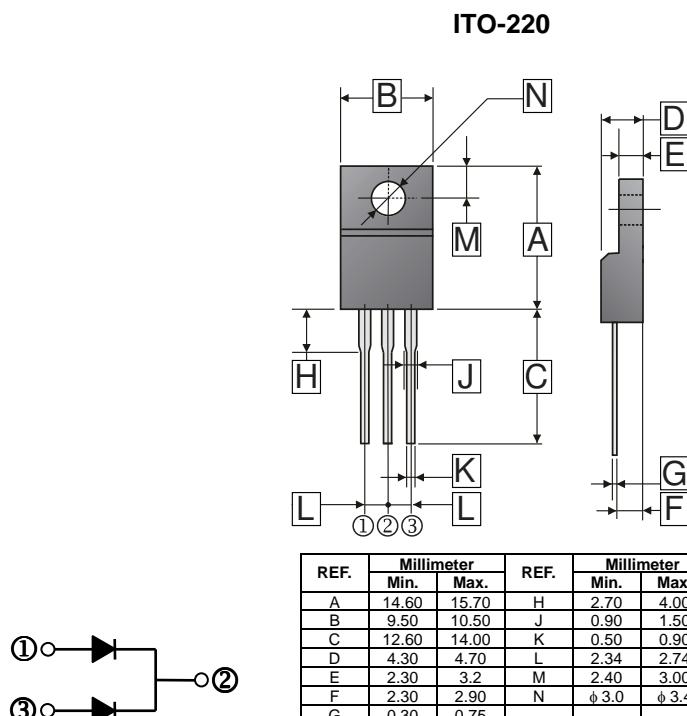

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, de-rate current by 20%.)

Parameter	Symbol	Rating		Unit	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	120		V	
Working Peak Reverse Voltage	V_{RSM}	120		V	
Maximum DC Blocking Voltage	V_{DC}	120		V	
Maximum Average Forward Rectified Current	I_F	15		A	
(Per Leg) (Per Device)		30			
Peak Forward Surge Current, 8.3 ms single half sine-wave	I_{FSM}	150		A	
Voltage Rate of Change (Rated V_R)	dv/dt	10000		V / μ s	
Typical Thermal Resistance	$R_{\theta JC}$	4		$^{\circ}$ C / W	
Operating and Storage Temperature Range	T_J, T_{STG}	-40~150		$^{\circ}$ C	

ELECTRICAL CHARACTERISTICS

Parameter	Symbol	Typ.	Max.	Unit	Test Condition
Maximum Instantaneous Forward Voltage	V_F	0.66	0.7	V	$I_F = 3A, T_J = 25^{\circ}C$
		0.71	0.75		$I_F = 5A, T_J = 25^{\circ}C$
		0.80	0.85		$I_F = 10A, T_J = 25^{\circ}C$
		0.84	0.87		$I_F = 15A, T_J = 25^{\circ}C$
		0.72	-		$I_F = 15A, T_J = 125^{\circ}C$
Maximum DC Reverse Current at Rated DC Blocking Voltage ²	I_R	-	0.1	mA	$T_J=25^{\circ}C$
		-	10		$T_J=100^{\circ}C$
Typical Junction Capacitance ¹	C_J	210	-	pF	

NOTES:

1. Measured at 1MHz and applied reverse voltage of 5.0V D.C.
2. Pulse Test : Pulse Width = 300 μ s, Duty Cycle $\leq 2.0\%$.

RATINGS AND CHARACTERISTIC CURVES

