

RoHS Compliant Product

A suffix of "-C" specifies halogen-free and RoHS Compliant

FEATURES


- Ideal for surface mount applications
- Easy pick and place
- Built-in strain relief
- Low forward voltage drop

PACKAGING INFORMATION

- Metallurgically bonded construction
- Polarity: Color band denotes cathode end
- Case: Molded plastic
- Epoxy: UL94-V0 rate flame retardant
- Weight: 0.032 grams (approximately)

PACKAGE INFORMATION


Package	MPQ	Leader Size
SMAF	3K	7 inch

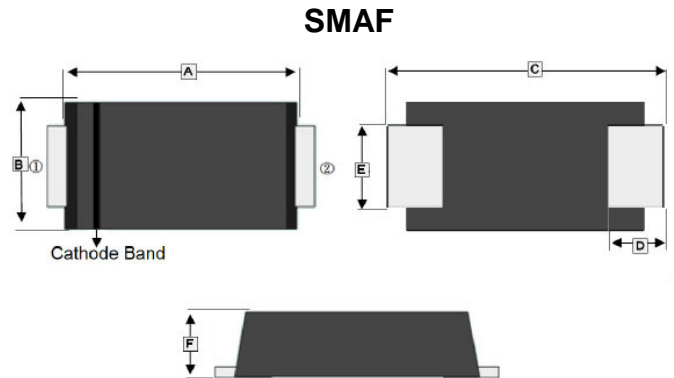

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	3.95	4.60	D	0.75	1.50
B	2.25	2.95	E	1.25	1.65
C	4.80	5.60	F	0.90	1.10

ORDER INFORMATION

Part Number	Type
SM220AF~SM2200AF	Lead (Pb)-free
SM220AF-C~SM2200AF-C	Lead (Pb)-free and Halogen-free



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load. For capacitive load, de-rate current by 20%.)

Parameter	Symbol	Part Number						Unit	
		SM 220AF	SM 240AF	SM 260AF	SM 2100AF	SM 2150AF	SM 2200AF		
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	20	40	60	100	150	200	V	
Working Peak Reverse Voltage	V_{RMS}	14	28	42	70	105	140	V	
Maximum DC Blocking Voltage	V_R	20	40	60	100	150	200	V	
Maximum Instantaneous Forward Voltage @ 2A	V_F	0.45	0.5	0.7	0.85	0.87	0.9	V	
Maximum Average Forward Rectified Current, See Fig.1	I_O	2						A	
Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	50						A	
Maximum Reverse Current ²	$T_C=25^\circ\text{C}$	0.5			0.2			mA	
	$T_C=100^\circ\text{C}$	15			5				
Typical Thermal Resistance	$R_{\theta JA}$	120						°C / W	
Typical Thermal Resistance	$R_{\theta JC}$	90							
Diode Junction Capacitance (Typ.) ¹	C_J	70	50		40			pF	
Operating Temperature Range	T_J	-50 ~ 125				-50~150			°C
Storage Temperature Range	T_{STG}	-50~150						°C	

Notes:

1. $f=1\text{MHz}$ and applied 4V DC reverse voltage
2. Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$.

RATINGS AND CHARACTERISTIC CURVES

FIG. 1-TYPICAL FORWARD CURRENT DERATING CURVE

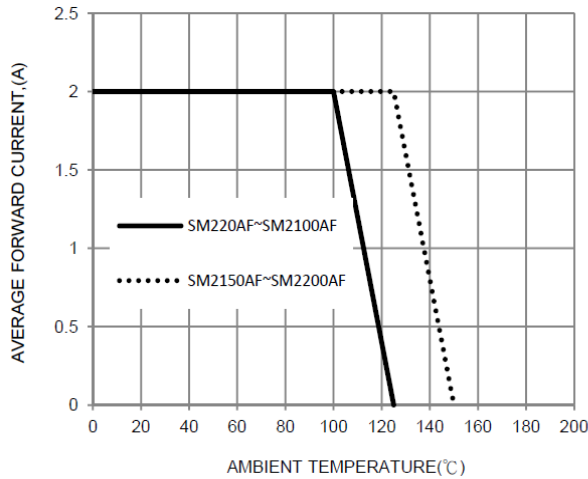


FIG. 2-TYPICAL FORWARD CHARACTERISTICS

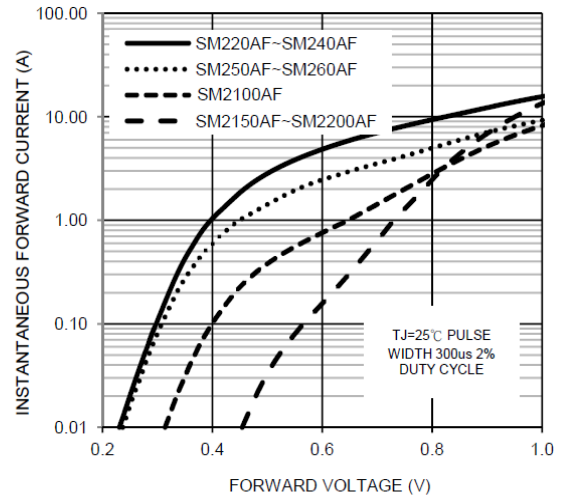


FIG. 3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

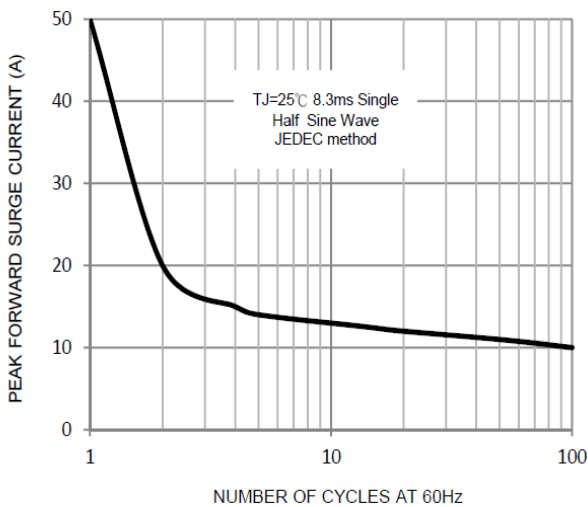


FIG. 4-TYPICAL REVERSE CHARACTERISTICS

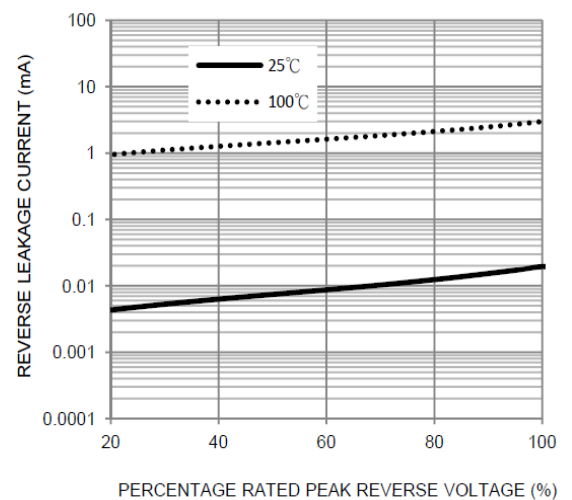


FIG. 5-TYPICAL JUNCTION CAPACITANCE

