



RoHS compliant product
A suffix of "-C" specifies halogen free

FEATURES

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction

MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Lead solderable per MIL-STD-202 method 208 guaranteed
- Polarity: As Marked
- Mounting position: Any
- Weight: 1.933 grams (Approximately)

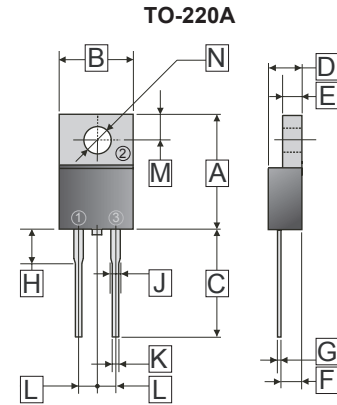

Dimensions in millimeters

| REF. | Millimeter | | REF. | Millimeter | |
|------|------------|-------|------|------------|-------|
| | Min. | Max. | | Min. | Max. |
| A | - | 15.10 | H | - | 4.00 |
| B | - | 10.50 | J | - | 1.30 |
| C | 14.0 | - | K | - | 1.00 |
| D | 3.05 TYP. | | L | 2.54 TYP. | |
| E | 1.27 TYP. | | M | 2.75 TYP. | |
| F | - | - | N | ∅ 3.6 | ∅ 4.0 |
| G | - | - | | | |

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.


| TYPE NUMBER | SYMBOL | VALUES | UNITS |
|---|-----------------|------------|---|
| Maximum Recurrent Peak Reverse Voltage | V_{RRM} | 40 | V |
| Working Peak Reverse Voltage | V_{RSM} | 40 | V |
| Maximum DC Blocking Voltage | V_{DC} | 40 | V |
| Maximum Average Forward Rectified Current See Fig. 1 | I_F | 5 | A |
| Peak Forward Surge Current, 8.3 ms single half sine-wave Superimposed on rated load (JEDEC method) | I_{FSM} | 120 | A |
| Maximum Instantaneous Forward Voltage ($I_F = 5$ Amps) | V_F | 0.55 | V |
| Maximum DC Reverse Current at Rated DC Blocking Voltage | I_R | 0.5 45 | $T_A = 25^\circ\text{C}$ $T_A = 100^\circ\text{C}$ mA mA |
| Typical Junction Capacitance (Note 1) | C_J | 700 | pF |
| Typical Thermal Resistance $R_{\theta JC}$ (Note 2) | $R_{\theta JA}$ | 3.0 | $^\circ\text{C} / \text{W}$ |
| Operating Temperature Range T_J | T_J | -50 ~ +150 | $^\circ\text{C}$ |
| Storage Temperature Range T_{STG} | T_{STG} | -65 ~ +175 | $^\circ\text{C}$ |

NOTES:


1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance Junction to Case.

RATINGS AND CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

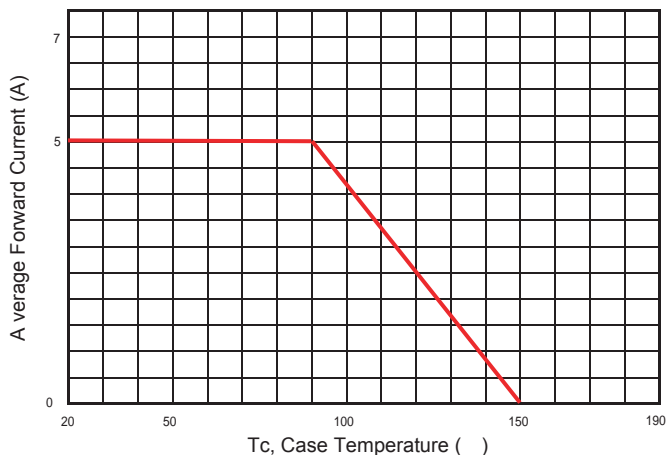


Typical Forward Characteristic

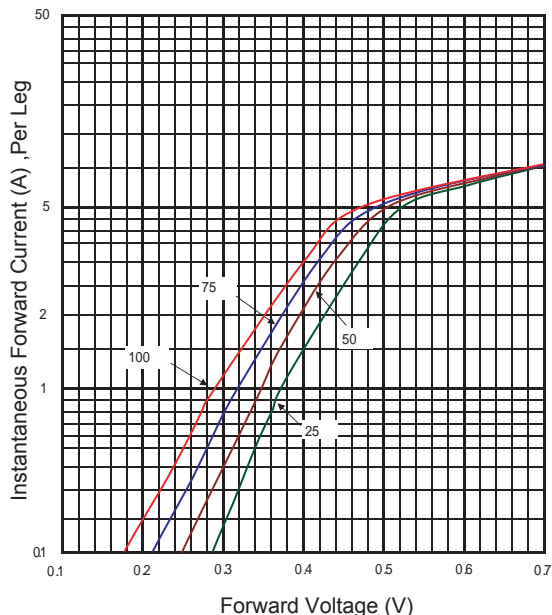

Typical Junction Capacitance

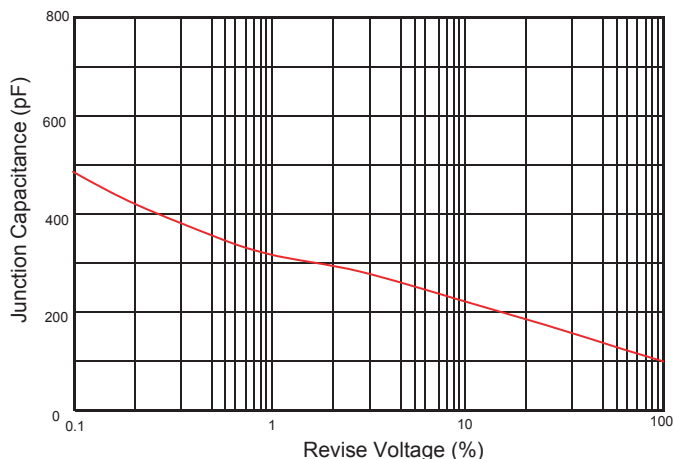

Maximum Non- Repetitive Forward Surge Current

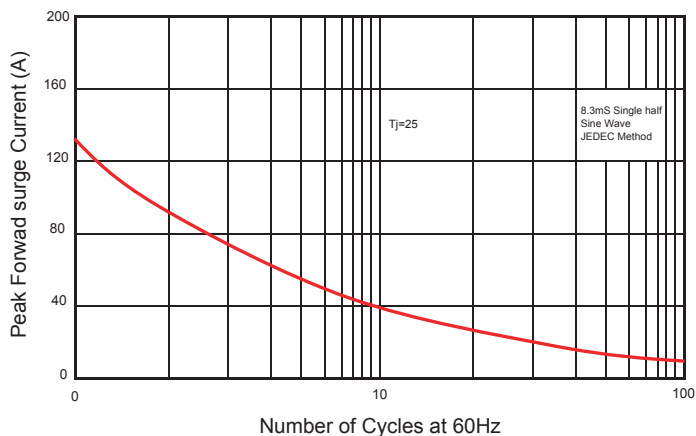

Typical Reverse Characteristic

