

RoHS Compliant Product

A suffix of "-C" specifies halogen and lead-free

## DESCRIPTION


Designed to protect voltage sensitive electronic components from ESD and other transients. Excellent clamping capability, low leakage, and fast response time provide best in class protection on designs that are exposed to ESD.

The combination of small size, high level of ESD protection makes them a flexible solution for applications such as HDMI, Display Port TM, and MDDI interfaces. It is designed to replace multi-layer varistors (MLV) in consumer equipment applications such as mobile phone, notebook, PAD, STB, LCD TV etc.

## FEATURES

- IEC61000-4-2 (ESD)  $\pm 25\text{kV}$  (air),  $\pm 25\text{kV}$  (contact)
- 210 Watts Peak Pulse Power per (tp=8/20 $\mu\text{s}$ )
- Low Clamping Voltage
- Low Leakage Current
- IEC 61000-4-2 Level 4 ESD protection
- JESD22-A114-B ESD Rating of class 3B per human body model

## SOD-323

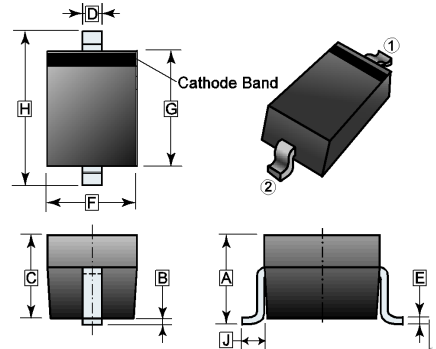

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	1.05 REF.		F	1.15	1.45
B	0.20 REF.		G	1.6	1.9
C	0.80	1.00	H	2.30	2.75
D	0.25	0.40	J	0.475 REF.	
E	0.080	0.20			



## MARKING

YU

## PACKAGE INFORMATION

Package	MPQ	Leader Size
SOD-323	3K	7 inch

## ORDER INFORMATION

Part Number	Type
SD03R	Lead (Pb)-free
SD03R-C	Lead (Pb)-free and Halogen-free

## ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub>=25°C unless otherwise specified)

Parameter		Symbol	Ratings	Unit
ESD Voltage (IEC61000-4-2) <sup>1</sup>	Air Model	V <sub>ESD</sub>	$\pm 25$	kV
	Contact Model		$\pm 25$	
ESD Voltage (JESD22-A114-B) <sup>1</sup>	Per Human Body Model		$\pm 16$	
	Machine Model		$\pm 0.4$	
Peak Pulse Power <sup>2</sup>		P <sub>PP</sub>	210	W
Peak Pulse Current <sup>2</sup>		I <sub>PP</sub>	16	A
Maximum Lead Solder Temperature @10 Second Duration		T <sub>L</sub>	260	°C
Operating Junction & Storage Temperature Range		T <sub>J</sub> , T <sub>STG</sub>	150, -55~150	°C

**ELECTRICAL CHARACTERISTICS** ( $T_A=25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Reverse Stand-off Voltage	$V_{RWM}$	-	-	3.3	V	
Reverse Leakage Current	$I_R$	-	-	10	$\mu\text{A}$	$V_{RWM}=3.3\text{V}$
Breakdown Voltage	$V_{(BR)}$	5	-	5.9	V	$I_T=1\text{mA}$
Clamping Voltage <sup>2</sup>	$V_C$	-	-	13	V	$I_{PP}=16\text{A}$
Forward Voltage	$V_F$	-	-	0.9	V	$I_F=10\text{mA}$
Junction Capacitance	$C_J$	-	120	-	pF	$V_R=0\text{V}$ , $f=1\text{MHz}$

Notes:

1. Device stressed with ten non-repetitive ESD pulses.
2. Non-repetitive current pulse 8/20 $\mu\text{s}$  exponential decay waveform according to IEC61000-4-5.


**ESD STANDARDS COMPLIANCE**

**IEC61000-4-2 Standard**


Contact Discharge		Air Discharge	
Level	Test Voltage kV	Level	Test Voltage kV
1	2	1	2
2	4	2	4
3	6	3	8
4	8	4	15

**JESD22-A114-B Standard**

ESD Class	Human Body Discharge V
0	0~249
1A	250~499
1B	500~999
1C	1000~1999
2	2000~3999
3A	4000~7999
3B	8000~15999

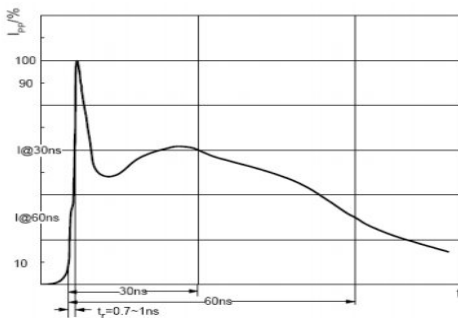


ESD pulse waveform according to IEC61000-4-2

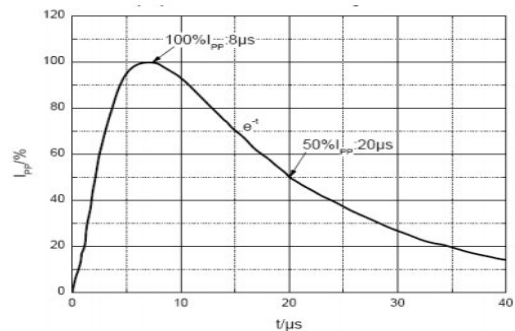

8/20 $\mu\text{s}$  pulse waveform according to IEC 61000-4-5

**ELECTRICAL PARAMETER**

Symbol	Parameter
$V_C$	Clamping Voltage @ $I_{PP}$
$I_{PP}$	Peak Pulse Current
$V_{BR}$	Breakdown Voltage @ $I_T$
$I_T$	Test Current
$I_R$	Reverse Leakage Current @ $V_{RWM}$
$V_{RWM}$	Reverse Standoff Voltage
$V_F$	Forward Voltage @ $I_F$
$I_F$	Forward Current

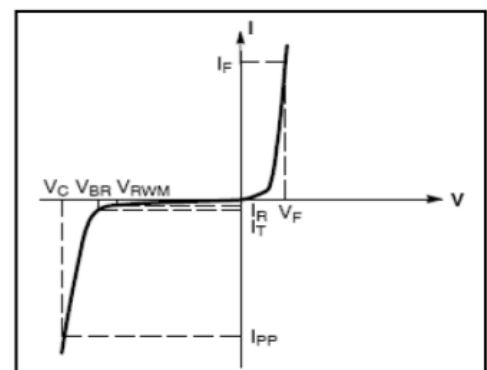

**V-I characteristics for a uni-directional TVS**

**ELECTRICAL CHARACTERISTICS CURVE**

