



A suffix of "-C" specifies halogen-free.



1206 (SOD-123)

FEATURES

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Low profile package
- Built-in strain relief
- Metal to silicon rectifier , majority carrier conduction
- Low power loss , High efficiency
- High current capability
- High surge capacity
- RoHS Compliant Product

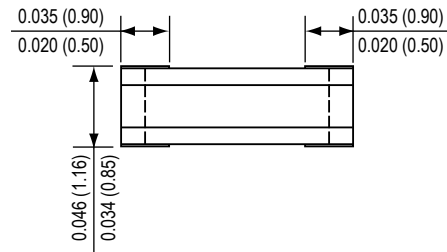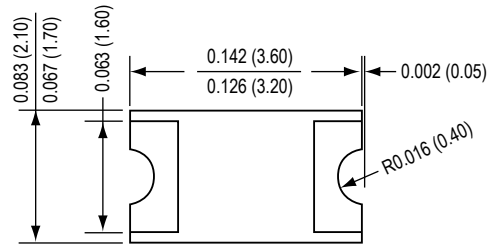

Dimensions in inches and (millimeters)

MECHANICAL DATA

Case : Packed with FRP substrate and epoxy underfilled

Terminals : Solder plated , solderable per MIL-STD-750, Method 2026

Polarity : Laser marking

Weight : 0.02 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.

TYPE NUMBER	SYMBOLS	SCDH103	SCDH104	SCDH105	SCDH106	SCDH107	UNIT
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	200	400	600	800	1000	V
Working Peak Reverse Voltage	V_{RMS}	200	400	600	800	1000	V
Maximum DC Blocking Voltage	V_{DC}	200	400	600	800	1000	V
Maximum Average Forward Rectified Current	$I_{(AV)}$	1					A
Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	30			25		A
Maximum Instantaneous Forward Voltage at 1.0A	V_F	1.7					V
Maximum DC Reverse Current $T_a=25^\circ\text{C}$ at Rated DC Blocking Voltage $T_a=125^\circ\text{C}$	I_R	5 50					μA
Maximum reverse recovery time	T_{rr}	50			75		nS
Typical Junction Capacitance (Note 1.)	C_j	10					pF
Operating Temperature Range	T_J	-50 ~ +125					$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65 ~ +150					$^\circ\text{C}$

NOTES:

1. Measured at 1.0MHz and applied reverse voltage of 4.0 Volts.

2. Marking:

- SCDH103 : 57ZD
- SCDH104 : 57ZG
- SCDH105 : 57ZJ
- SCDH106 : 57ZK
- SCDH107 : 57ZM

FIG.1 - FORWARD CURRENT DERATING CURVE

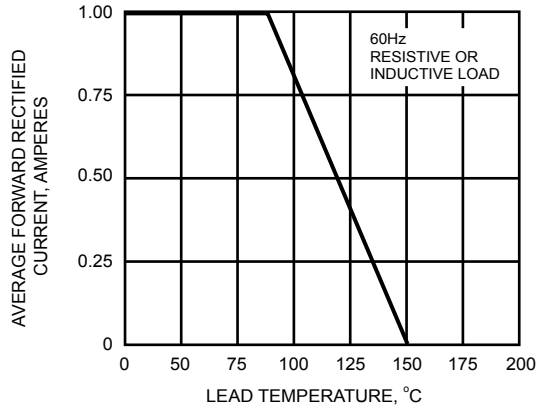


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

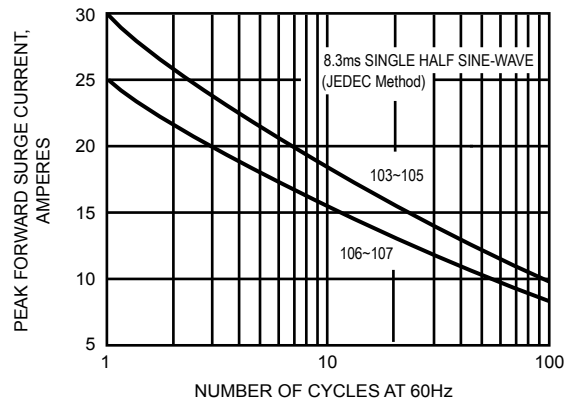


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

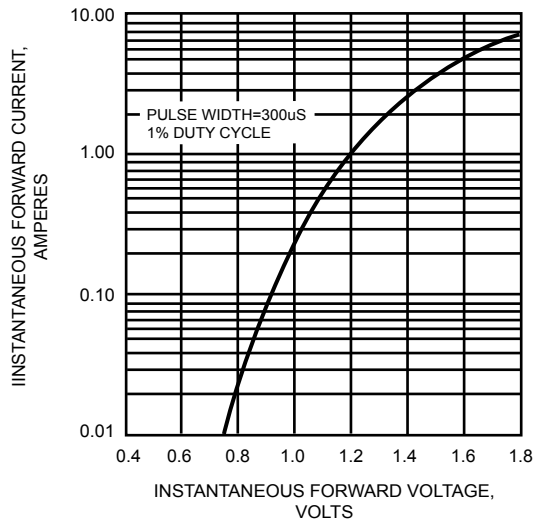


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

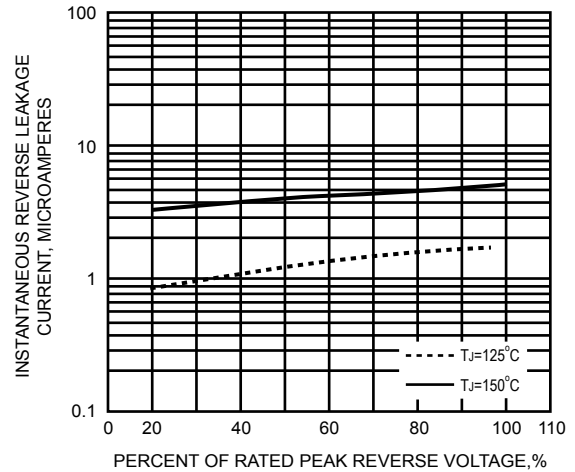


FIG.5 - TYPICAL JUNCTION CAPACITANCE

