

RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free


FEATURES

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- High speed switching

PACKAGING INFORMATION

- Glass Passivated
- Case: Molded plastic
- Epoxy: UL 94V-0 rate flame retardant
- Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- Polarity: Color band denotes cathode end
- Mounting position: Any
- Weight: 0.34 grams (approximately)

DO-41

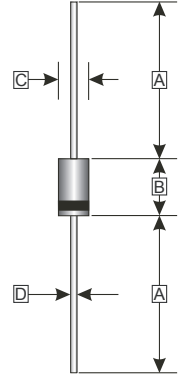

REF.	Millimeter	
	Min.	Max.
A	25.4 (TYP)	
B	4.10	5.21
C	2.00	2.72
D	0.70	0.90

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

$T_{AMB} = 25^{\circ}\text{C}$ ambient temperature unless otherwise specified.
Single phase half-wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

PARAMETERS	SYMBOL	PART NUMBERS							UNITS	TESTING CONDITIONS
		HER 101 G	HER 102 G	HER 103 G	HER 104 G	HER 105 G	HER 106 G	HER 107 G		
Recurrent Reverse Voltage (Max.)	V_{RRM}	50	100	200	400	600	800	1000	V	
RMS Voltage (Max.)	V_{RMS}	35	70	140	280	420	560	700	V	
DC Blocking Voltage (Max.)	V_{DC}	50	100	200	400	600	800	1000	V	
Instantaneous Forward Voltage (Max.)	V_F	1.00		1.30	1.70			V	$I_F = 1\text{A}$	
Average Forward Rectified Current (Max.)	I_O	1.0							A	0.375" (9.5mm) lead length @ $T_A = 55^{\circ}\text{C}$
Peak Forward Surge Current	I_{FSM}	30							A	8.3 ms single half sine-wave superimposed on rated load (JEDEC method)
DC Reverse Current (Max.)	I_R	5.0							μA	$V_R = V_{DC}, T_A = 25^{\circ}\text{C}$
		150								$V_R = V_{DC}, T_A = 100^{\circ}\text{C}$
Reverse Recovery Time (Max.)	T_{RR}	50			70				nS	$I_F = 0.5\text{A}, I_R = 1.0\text{A}, I_{RR} = 0.25\text{A}$
Junction Capacitance (Typ.)	C_J	20			15				pF	$f = 1\text{MHz}$ and applied 4V DC reverse voltage
Storage Temperature Range	T_{STG}	-65 ~ 150							$^{\circ}\text{C}$	

RATINGS AND CHARACTERISTIC CURVES (HER101G THRU HER107G)

FIG.1-TYPICAL FORWARD CHARACTERISTICS

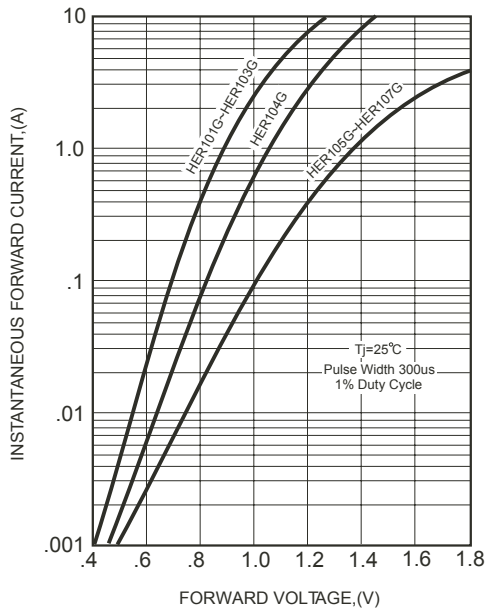


FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

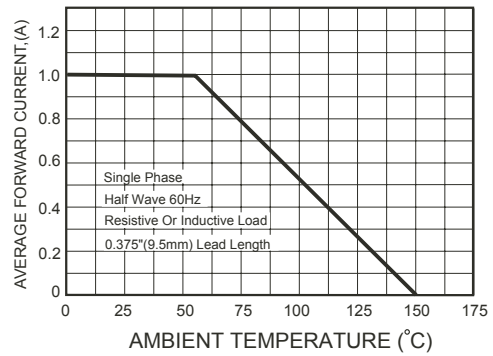


FIG.4-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT


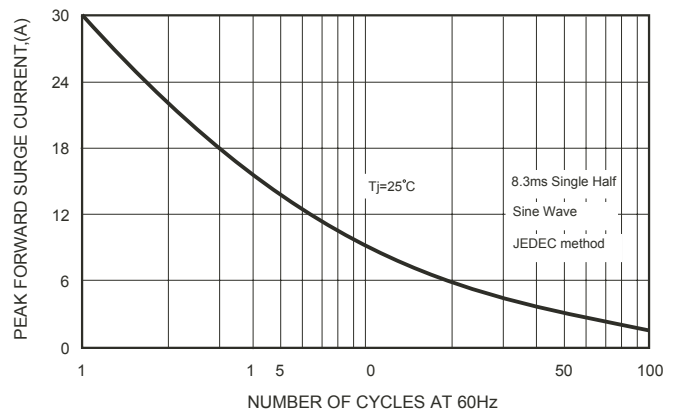


FIG.3- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTICS

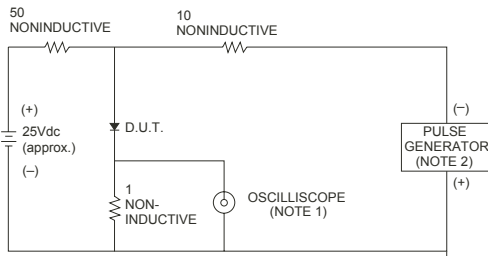

NOTES: 1. Rise Time= 7ns max., Input Impedance= 1 megohm.22pF.
2. Rise Time= 10ns max., Source Impedance= 50 ohms.

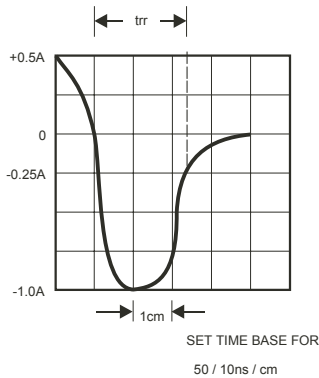


FIG.5-TYPICAL JUNCTION CAPACITANCE

