



RoHS Compliant Product
A suffix of "-C" specifies halogen free

FEATURES

- Low forward voltage drop
- Low reverse current
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction

MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Lead solder able per MIL-STD-202 method 208 guaranteed
- Polarity: As Marked
- Mounting position: Any
- Weight: 1.93 grams (approximate)

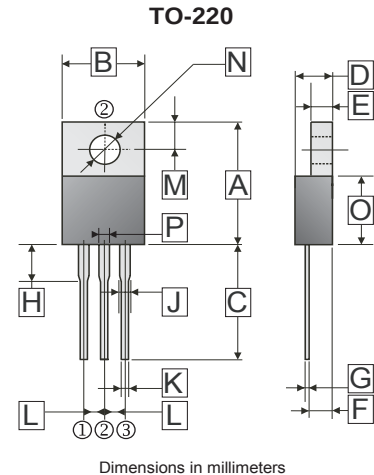

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	14.22	16.51	J	0.7	1.78
B	9.65	10.67	K	0.38	1.02
C	12.50	14.75	L	2.39	2.69
D	3.56	4.90	M	2.50	3.43
E	0.51	1.45	N	3.10	4.09
F	2.03	2.92	O	8.38	9.65
G	0.31	0.76	P	0.89	1.45
H	3.5	4.5			

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, de-rate current by 20%.)


Parameter		Symbol	Rating	Unit
Maximum Recurrent Peak Reverse Voltage		V_{RRM}	100	V
Working Peak Reverse Voltage		V_{RSM}	100	V
Maximum DC Blocking Voltage		V_{DC}	100	V
Maximum Average Forward Rectified Current	Per Leg	I_F	20	A
	Per Device		40	
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)		I_{FSM}	300	A
Maximum Instantaneous Forward Voltage	$I_F = 20 \text{ A}, T_J = 25^\circ\text{C}, \text{ per leg}$	V_F	0.82	V
	$I_F = 20 \text{ A}, T_J = 125^\circ\text{C}, \text{ per leg}$		0.69	
Maximum DC Reverse Current at Rated DC Blocking Voltage ³	$T_J = 25^\circ\text{C}$	I_R	0.1	mA
	$T_J = 100^\circ\text{C}$		2	
Typical Junction Capacitance ¹		C_J	520	pF
Typical Thermal Resistance ²		$R_{\theta JC}$	4	$^\circ\text{C} / \text{W}$
Voltage Rate Of Change (Rated V_R)		dv / dt	10000	$\text{V} / \mu\text{s}$
Operating Temperature Range T_J		T_J	-50 ~ +175	$^\circ\text{C}$
Storage Temperature Range T_{STG}		T_{STG}	-65 ~ +150	$^\circ\text{C}$

Notes:


1. Measured at 1MHz and applied reverse voltage of 5.0V D.C.
2. Thermal Resistance Junction to Case.
3. Pulse test: 300μs pulse width, 1% duty cycle.

RATINGS AND CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

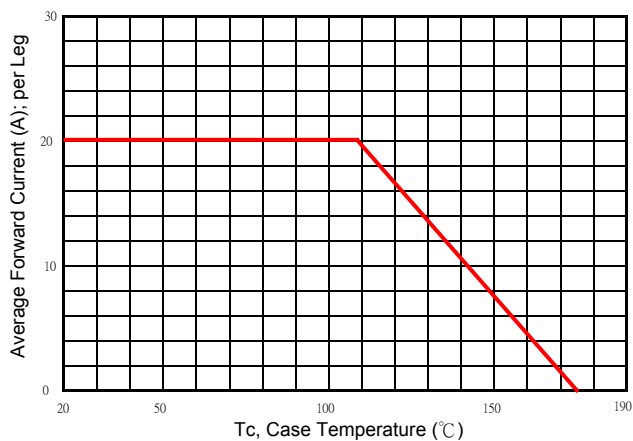


Typical Forward Characteristic

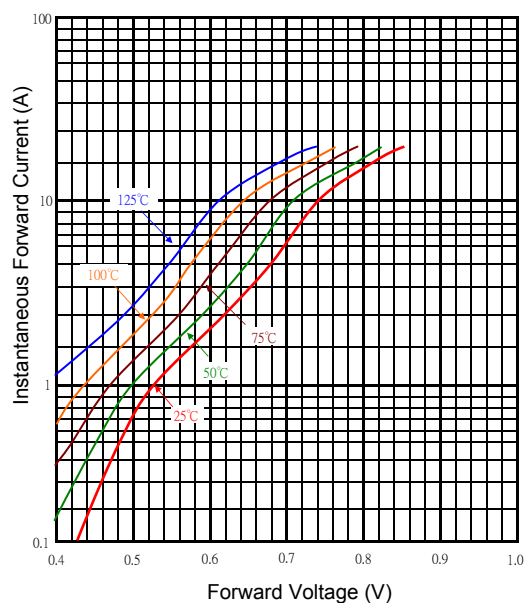

Typical Junction Capacitance

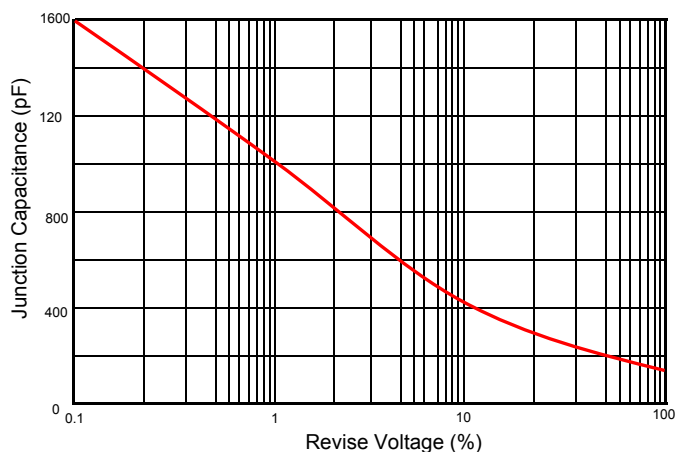

Maximum Non- Repetitive Forward Surge Current

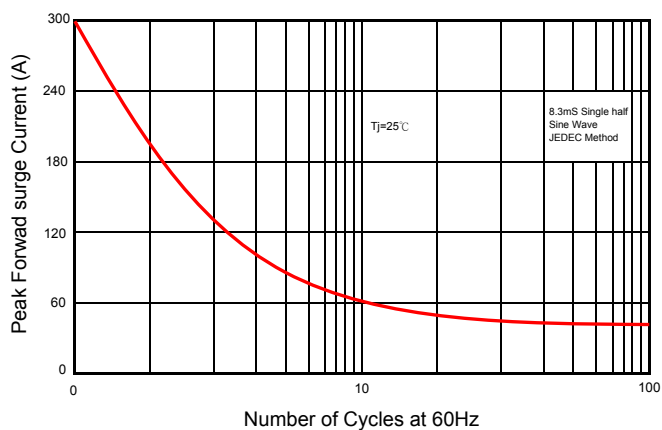

Typical Reverse Characteristic

