

RoHS Compliant Product
 A suffix of "-C" specifies halogen and lead-free


DESCRIPTION

These miniature surface mount MOSFETs utilize a High Cell Density trench process to provide Low $R_{DS(on)}$ and to ensure minimal power loss heat dissipation. Typical applications are DC-DC converters and power management in portable and battery-powered products such as computers, printer, PCMCIA cards, cellular and cordless telephones.

FEATURES

- Low $R_{DS(on)}$ provides higher efficiency and extends battery life.
- Low thermal impedance copper leadframe SC-59 saves board Space.
- Fast switching speed.
- High performance trench technology.


SC-59

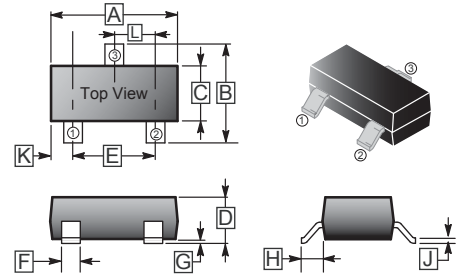

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	2.70	3.10	G	0.10 REF.	
B	2.25	3.00	H	0.40 REF.	
C	1.30	1.70	J	0.10	0.20
D	1.00	1.40	K	0.45	0.55
E	1.70	2.30	L	0.85	1.15
F	0.35	0.50			

PACKAGE INFORMATION

Package	MPQ	LeaderSize
SC-59	3K	7' inch

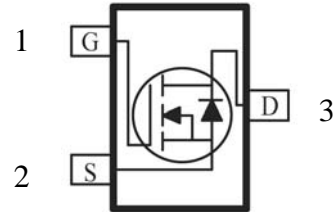

ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Ratings	Unit
Drain-Source Voltage	V_{DS}	40	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current ¹	$I_D @ T_A=25^\circ\text{C}$	5.2	A
	$I_D @ T_A=70^\circ\text{C}$	4.1	A
Pulsed Drain Current ²	I_{DM}	30	A
Continuous Source Current (Diode Conduction) ¹	I_S	1.6	A
Power Dissipation ¹	$P_D @ T_A=25^\circ\text{C}$	1.3	W
	$P_D @ T_A=70^\circ\text{C}$	0.8	W
Operating Junction and Storage Temperature Range	T_j, T_{stg}	-55 ~ 150	$^\circ\text{C}$
Thermal Resistance Ratings			
Maximum Junction to Ambient ¹	$t \leq 5 \text{ sec}$	100	$^\circ\text{C} / \text{W}$
	Steady State	166	

Notes

- 1 Surface Mounted on 1" x 1" FR4 Board.
- 2 Pulse width limited by maximum junction temperature.

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Gate-Threshold Voltage	$V_{GS(th)}$	1.0	-	-	V	$V_{DS}=V_{GS}$, $I_D=250\mu\text{A}$
Gate-Body Leakage	I_{GSS}	-	-	± 100	nA	$V_{DS}=0\text{V}$, $V_{GS}=20\text{V}$
Zero Gate Voltage Drain Current	I_{DSS}	-	-	1	μA	$V_{DS}=32\text{V}$, $V_{GS}=0\text{V}$
		-	-	25		$V_{DS}=32\text{V}$, $V_{GS}=0\text{V}$, $T_J=55^\circ\text{C}$
On-State Drain Current ¹	$I_{D(on)}$	20	-	-	A	$V_{DS}=5\text{V}$, $V_{GS}=10\text{V}$
Drain-Source On-Resistance ¹	$R_{DS(ON)}$	-	-	86	m Ω	$V_{GS}=10\text{V}$, $I_D=5.2\text{A}$
		-	-	128		$V_{GS}=4.5\text{V}$, $I_D=3.7\text{A}$
Forward Transconductance ¹	g_{fs}	-	40	-	S	$V_{DS}=15\text{V}$, $I_D=5.2\text{A}$
Diode Forward Voltage	V_{SD}	-	0.7	-	V	$I_S=2.3\text{A}$, $V_{GS}=0\text{V}$
Dynamic ²						
Total Gate Charge	Q_g	-	4.0	-	nC	$V_{DS}=15\text{V}$, $V_{GS}=4.5\text{V}$, $I_D=5.2\text{A}$
Gate-Source Charge	Q_{gs}	-	1.1	-		
Gate-Drain Charge	Q_{gd}	-	1.4	-		
Turn-on Delay Time	$T_{d(on)}$	-	16	-	nS	$V_{DD}=25\text{V}$, $V_{GEN}=10\text{V}$, $R_L=25\Omega$, $I_D=1\text{A}$
Rise Time	T_r	-	5	-		
Turn-off Delay Time	$T_{d(off)}$	-	23	-		
Fall Time	T_f	-	3	-		

Notes

- 1 Pulse test : $PW \leq 300 \mu\text{s}$ duty cycle $\leq 2\%$.
- 2 Guaranteed by design, not subject to production testing.