

RoHS Compliant Product
A suffix of "-C" specifies halogen free

DESCRIPTION

The SSG17N80SG is the highest performance trench N-ch MOSFETs with extreme high cell density, which provide excellent $R_{DS(ON)}$ and gate charge for most of the synchronous buck converter applications. The SSG17N80SG meet the RoHS and Green Product with Function reliability approved.

FEATURES

- $R_{DS(on)} \leq 6.3m\Omega @ V_{GS}=10V$
- $R_{DS(on)} \leq 8.5m\Omega @ V_{GS}=4.5V$
- High speed power switching, Logic Level
- Enhanced Body diode dv/dt capability
- Enhanced Avalanche Ruggedness
- 100% UIS Tested, 100% Rg Tested
- SOP-8 Package


MARKING




PACKAGE INFORMATION

Package	MPQ	Leader Size
SOP-8	2.5K	13 inch

SOP-8



REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	5.80	6.20	H	0.33	0.51
B	4.700	5.10	J	0.375 REF.	
C	3.80	4.00	K	45°REF.	
D	0°	8°	L	1.35	1.75
E	0.40	1.27	M	0.10	0.25
F	0.17	0.25	N	0.25 REF.	
G	1.27 TYP.				



ABSOLUTE MAXIMUM RATINGS (T_J=25°C unless otherwise specified)

Parameter	Symbol	Ratings	Unit
Drain-Source Voltage	V_{DS}	80	V
Gate-Source Voltage	V_{GS}	±20	V
Continuous Drain Current (Silicon Limited)	I_D	$T_C=25^\circ C$	17
		$T_C=100^\circ C$	10
Pulsed Drain Current	I_{DM}	120	A
Avalanche Energy, Single Pulse, @L=0.3mH	E_{AS}	240	mJ
Power Dissipation	P_D	3.1	W
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 ~ 150	°C
Thermal Resistance Ratings			
Maximum Thermal Resistance Junction-Ambient	$R_{\theta JA}$	$t \leq 10sec, 40$	°C / W
		Steady State, 75	
Maximum Thermal Resistance Junction-Lead	$R_{\theta JL}$	23	

ELECTRICAL CHARACTERISTICS ($T_J=25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test conditions	
Drain-Source Breakdown Voltage	BV_{DSS}	80	-	-	V	$V_{GS}=0, I_D=250\mu\text{A}$	
Gate Threshold Voltage	$V_{GS(th)}$	1	1.7	2.4	V	$V_{DS}=V_{GS}, I_D=250\mu\text{A}$	
Forward Transfer conductance	g_{fs}	-	50	-	S	$V_{DS}=5\text{V}, I_D=14\text{A}$	
Gate-Source Leakage Current	I_{GSS}	-	-	± 100	nA	$V_{GS}=\pm 20\text{V}$	
Drain-Source Leakage Current	I_{DSS}	$T_J=25^\circ\text{C}$	-	-	1	μA	$V_{DS}=80\text{V}, V_{GS}=0$
		$T_J=100^\circ\text{C}$	-	-	100		
Static Drain-Source On-Resistance	$R_{DS(ON)}$	-	4.8	6.3	m Ω	$V_{GS}=10\text{V}, I_D=14\text{A}$	
		-	6.2	8.5	m Ω	$V_{GS}=4.5\text{V}, I_D=10\text{A}$	
Total Gate Charge	Q_g	-	46	-	nC	$V_{GS}=10\text{V}$	
Total Gate Charge	Q_g	-	22	-		$V_{GS}=4.5\text{V}$	
Gate-Source Charge	Q_{gs}	-	9	-		$I_D=14\text{A}$	
Gate-Drain ("Miller") Change	Q_{gd}	-	8	-		$V_{DD}=40\text{V}$ $V_{GS}=10\text{V}$	
Turn-on Delay Time	$T_{d(on)}$	-	11	-	nS	$V_{DD}=40\text{V}$ $I_D=14\text{A}$ $V_{GS}=10\text{V}$ $R_G=10\Omega$	
Rise Time	T_r	-	7	-			
Turn-off Delay Time	$T_{d(off)}$	-	38	-			
Fall Time	T_f	-	9	-			
Input Capacitance	C_{iss}	-	3130	-	pF	$V_{GS}=0$ $V_{DS}=40\text{V}$ $f=1.0\text{MHz}$	
Output Capacitance	C_{oss}	-	385	-			
Reverse Transfer Capacitance	C_{riss}	-	18	-			
Source-Drain Diode							
Forward On Voltage	V_{SD}	-	0.9	1.2	V	$I_F=14\text{A}, V_{GS}=0$	
Reverse Recovery Time	T_{rr}	-	48	-	nS	$V_R=40\text{V}, I_F=14\text{A}, dI/dt=500\text{A}/\mu\text{s}$	
Reverse Recovery Charge	Q_{rr}	-	190	-	nC		

TYPICAL CHARACTERISTICS CURVE

Fig 1. Typical Output Characteristics

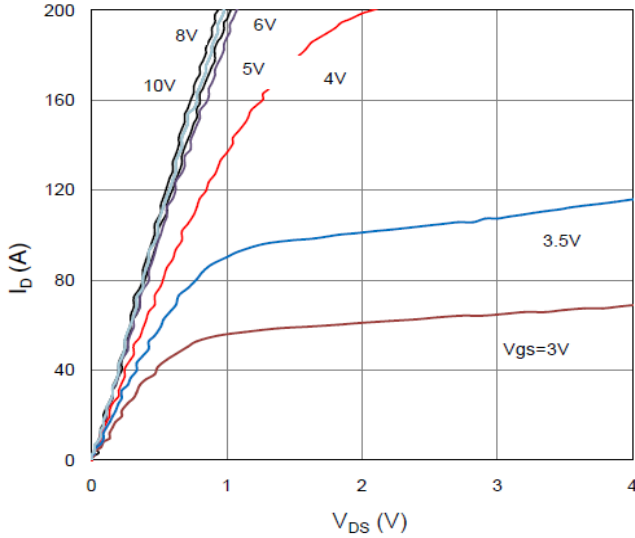


Figure 2. On-Resistance vs. Gate-Source Voltage

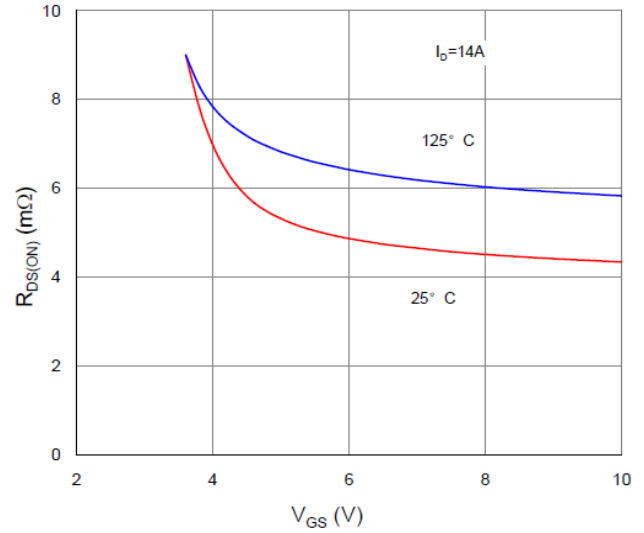


Figure 3. On-Resistance vs. Drain Current and Gate Voltage

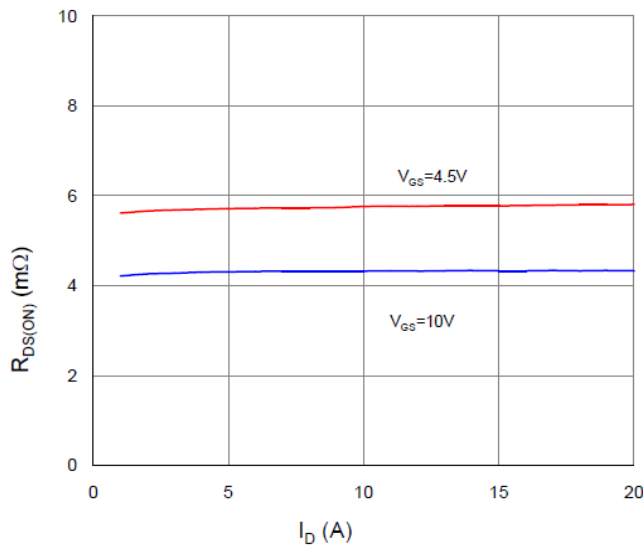


Figure 4. Normalized On-Resistance vs. Junction Temperature

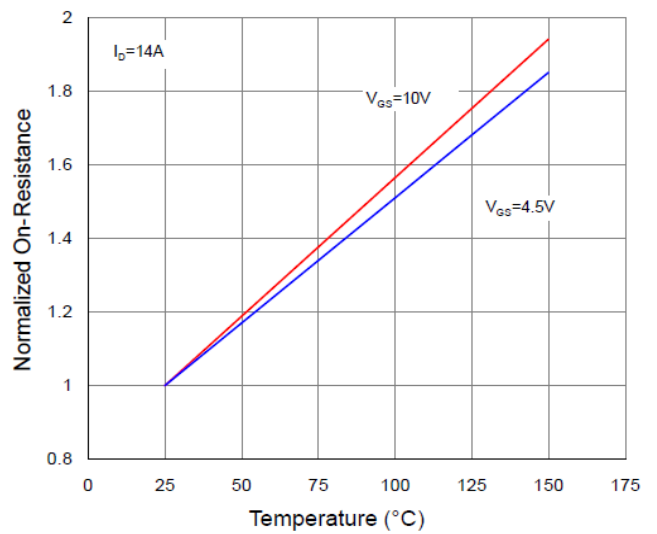


Figure 5. Typical Transfer Characteristics


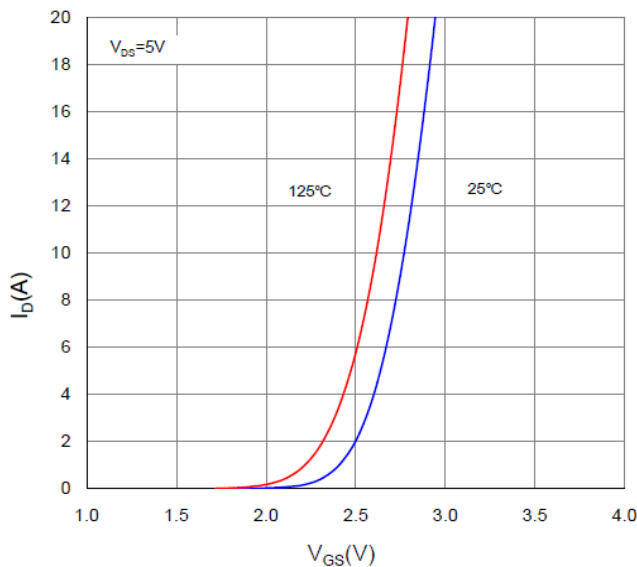


Figure 6. Typical Source-Drain Diode Forward Voltage

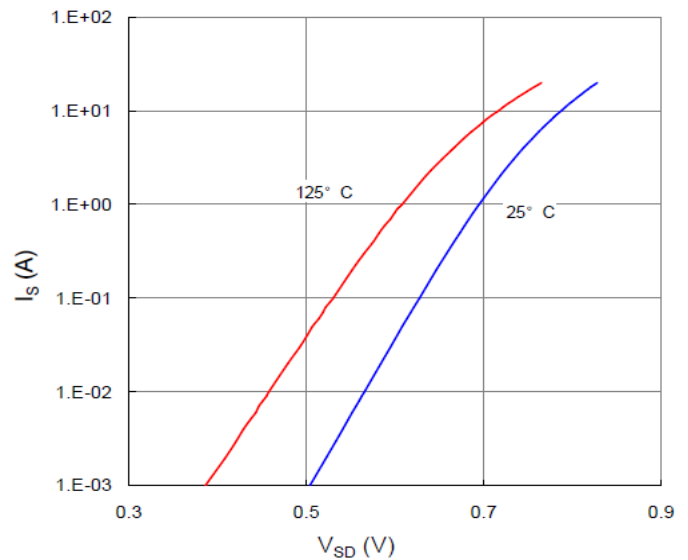

TYPICAL CHARACTERISTICS CURVE

Figure 7. Typical Gate-Charge vs. Gate-to-Source Voltage

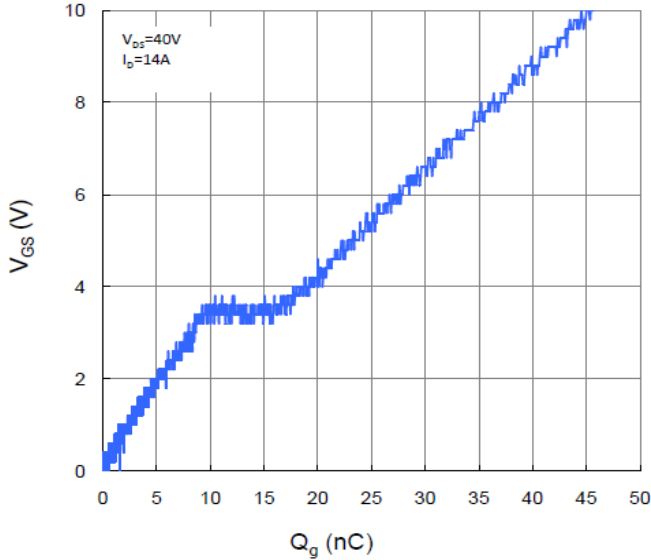


Figure 8. Typical Capacitance vs. Drain-to-Source Voltage

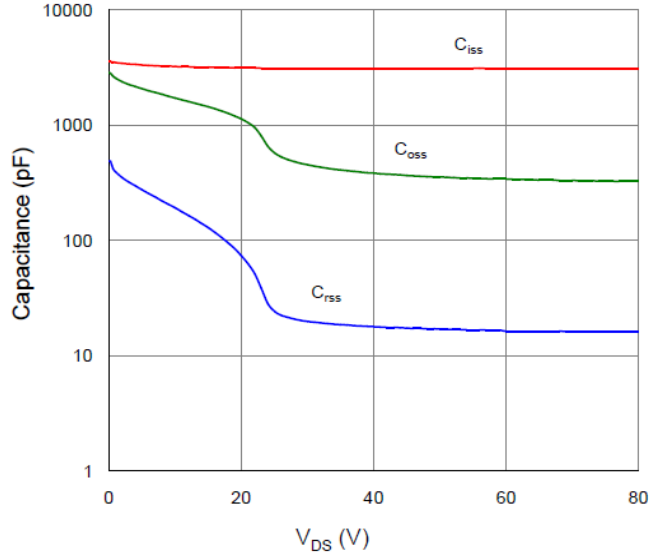


Figure 9. Maximum Safe Operating Area

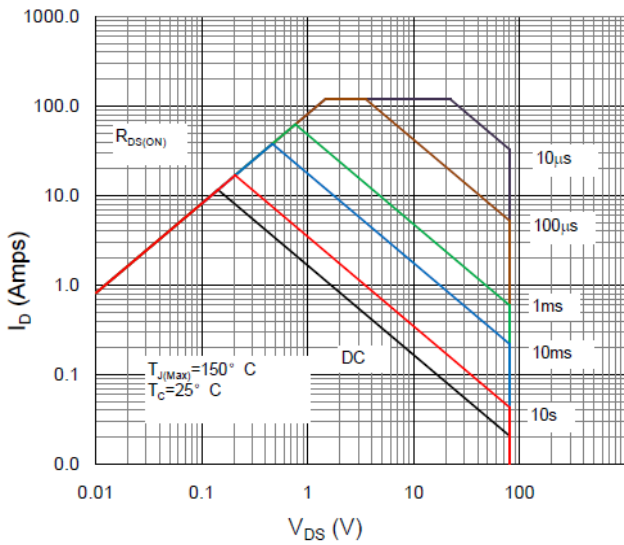


Figure 10. Maximum Drain Current vs. Case Temperature

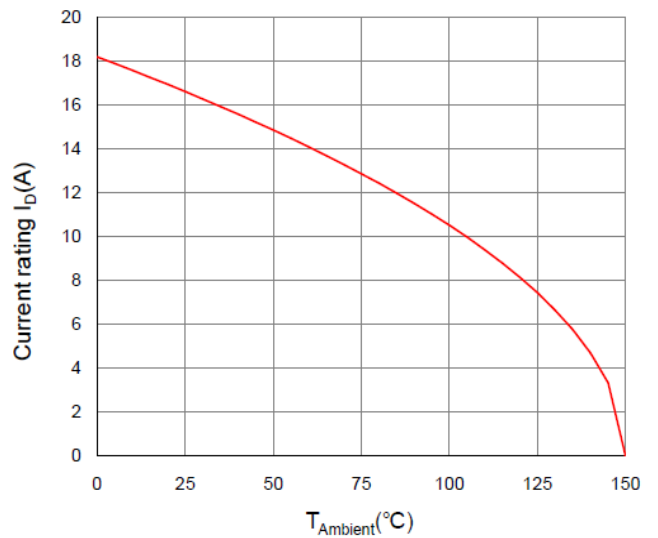


Figure 11. Normalized Maximum Transient Thermal Impedance, Junction-to-Ambient

