


RoHS Compliant Product

A suffix of "-C" specifies halogen & lead-free




FEATURES

- * Low forward voltage drop
- * High current capability
- * High reliability
- * High surge current capability
- * Epitaxial construction

MECHANICAL DATA

- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Lead: Lead solderable per MIL-STD-202, method 208 guaranteed
- * Polarity: As Marked
- * Mounting position: Any
- * Weight: 2.24 grams(Approximately)

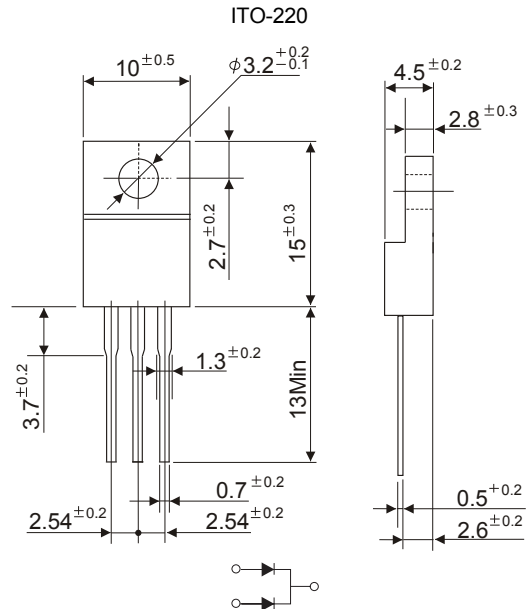

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER	SYMBOL	SBR3060RF	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	60	V
Working Peak Reverse Voltage	V_{RSM}	60	V
Maximum DC Blocking Voltage	V_{DC}	60	V
Maximum Average Forward Rectified Current (Per Leg)	I_F	15	A
(Per Device)		30	
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	180	A
Maximum Instantaneous Forward Voltage ($I_F = 15 \text{ Amps}, T_A = 25^\circ \text{C}$, per leg)	V_F	0.68	V
Maximum Instantaneous Forward Voltage ($I_F = 15 \text{ Amps}, T_A = 125^\circ \text{C}$, per leg)		0.62	
Maximum DC Reverse Current $T_a = 25^\circ \text{C}$	I_R	0.5	mA
at Rated DC Blocking Voltage (Note H) $T_a = 100^\circ \text{C}$		12	
Typical Junction Capacitance (Note 1)	C_J	1700	pF
Typical Thermal Resistance θ_{JC} (Note 2)	$R_{\theta JC}$	4.0	$^\circ \text{C/W}$
Voltage Rate Of Change (Rated V_R)	dv/dt	10000	V/us
Operating Temperature Range	T_J	-50 ~ +150	$^\circ \text{C}$
Storage Temperature Range	T_{STG}	-65 ~ +175	$^\circ \text{C}$


NOTES:

1. Measured at 1MHz and applied reverse voltage of 5.0V D.C.
2. Thermal Resistance Junction to Case.


H Ü | ^ A ^ o k U ^ ^ A ä c M H E E • E Ö ° c A ° & ^ A M G E Ä E

RATING AND CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

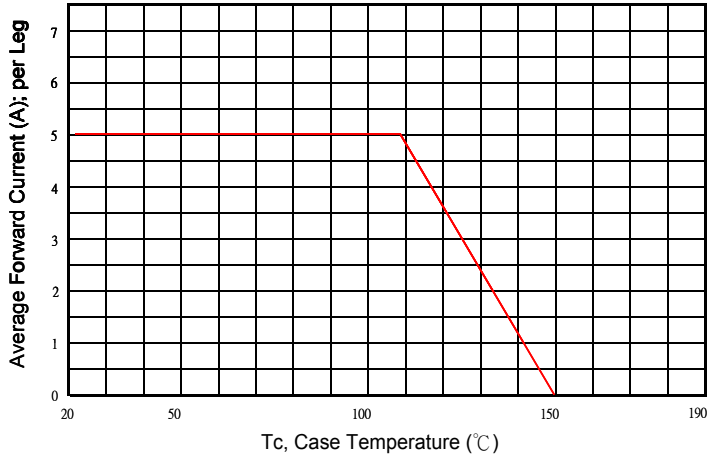


Typical Forward Characteristic

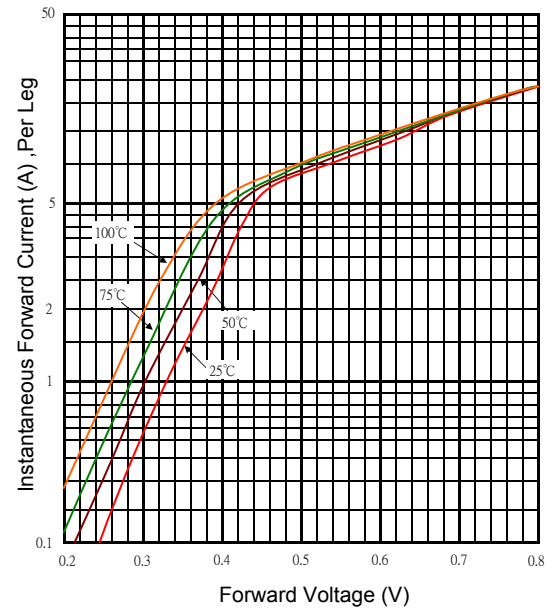

Typical Junction Capacitance

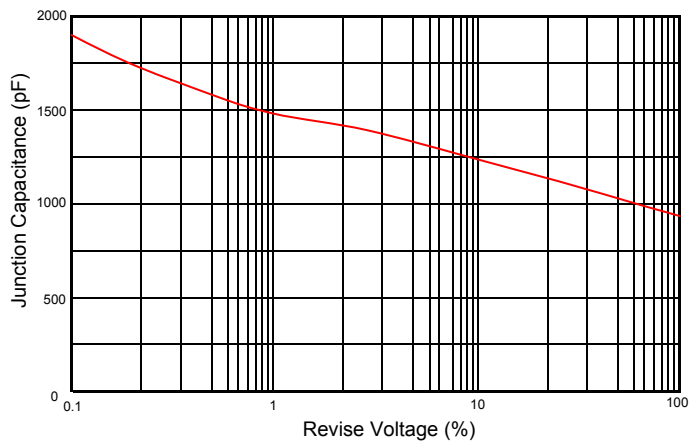

Typical Reverse Characteristic

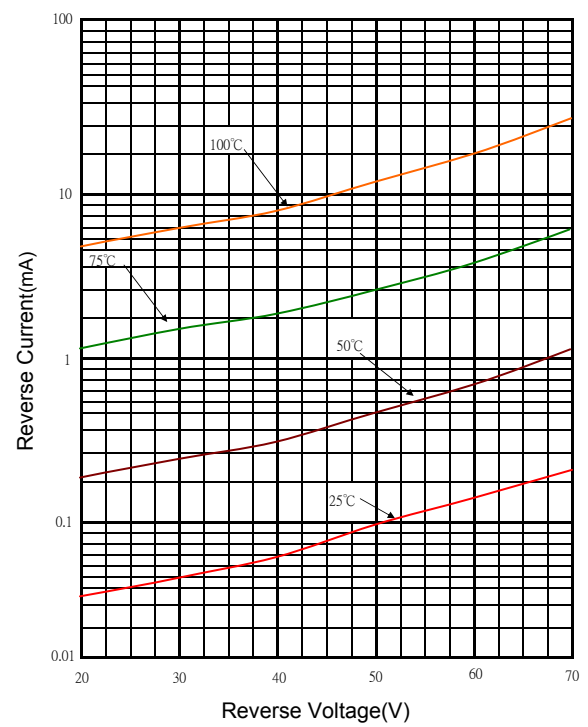

Maximum Non- Repetitive Forward Surge Current

