


RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free

FEATURES


- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Epitaxial construction

MECHANICAL DATA

- Case: Molded plastic
- Epoxy: UL94V-0 rate flame retardant
- Lead: Lead solderable per MIL-STD-202 method 208
- Polarity: As Marked
- Mounting position: Any
- Weight: 0.7 grams



TO-252(D-PACK)

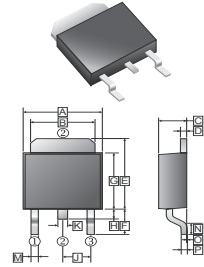

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	6.35	6.8	J	2.30	REF.
B	5.20	5.50	K	0.70	0.90
C	2.20	2.40	L	0.50	0.70
D	0.43	0.58	M	0.60	0.90
E	6.40	7.35	N	1.40	1.78
F	2.40	3.00	O	0	0.15
G	5.40	5.80	P	0.43	0.58
H	0.60	1.20			

MAXIMUM RATINGS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, de-rate current by 20%.


PARAMETER	SYMBOL	RATING	UNIT
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	200	V
Maximum RMS Voltage	V_{RMS}	140	V
Maximum DC Blocking Voltage	V_{DC}	200	V
Maximum Average Forward Rectified Current	I_F	5	A
Peak Forward Surge Current, 8.3 ms single half sine-wave superimposed on rated load	I_{FSM}	120	A
Maximum Instantaneous Forward Voltage @ 5A	$T_A=25^\circ\text{C}$	0.92	V
	$T_A=100^\circ\text{C}$	0.75	
Maximum DC Reverse Current at Rated DC Blocking Voltage (Note 3)	$T_A=25^\circ\text{C}$	0.1	mA
	$T_A=100^\circ\text{C}$	5	
Typical Junction Capacitance (Note 1)	C_J	350	pF
Voltage Rate Of Change (Rated V_R)	dv / dt	10000	V / μs
Typical Thermal Resistance (Note 2)	$R_{\theta Jc}$	12	$^\circ\text{C/W}$
	$R_{\theta JA}$	95.8	
Operating & Storage Temperature	T_J, T_{STG}	-55~150	$^\circ\text{C}$

NOTES:


1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.
2. Thermal Resistance , mounted 6.2mmx5.8mm Cu pad size on FR-4 board.
3. Pulse test: 300uS pulse width, 1% duty cycle.

RATINGS AND CHARACTERISTIC CURVES


Typical Forward Current Derating Curve

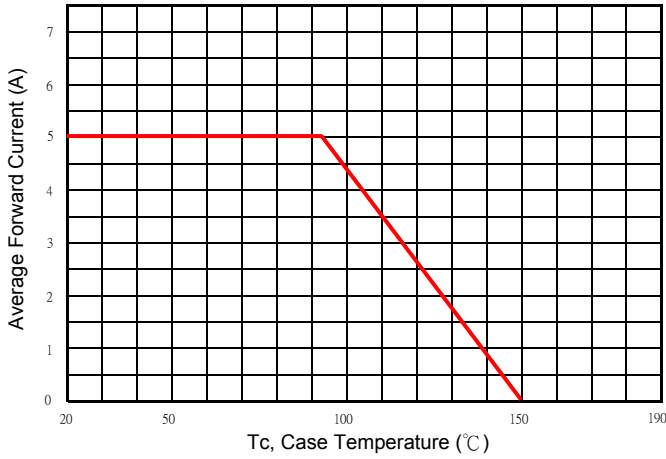


Typical Forward Characteristic

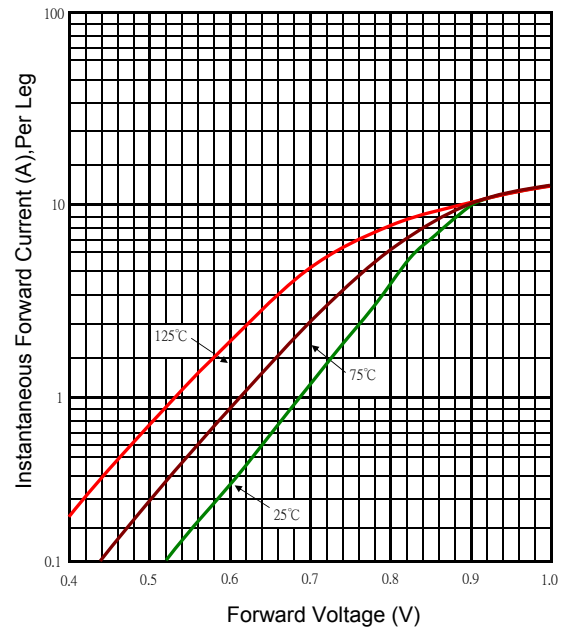

Typical Junction Capacitance

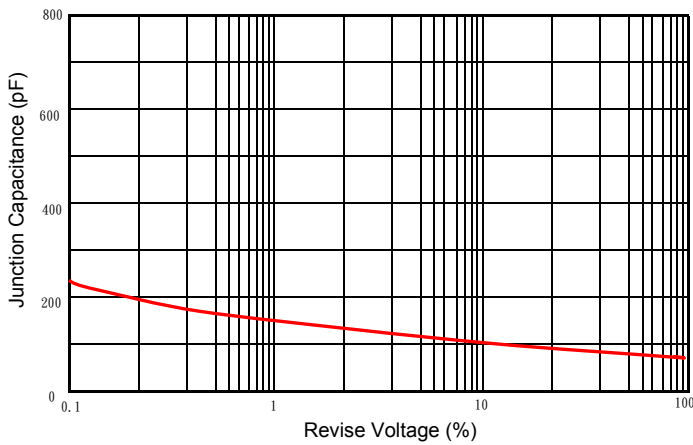

Maximum Non- Repetitive Forward Surge Current

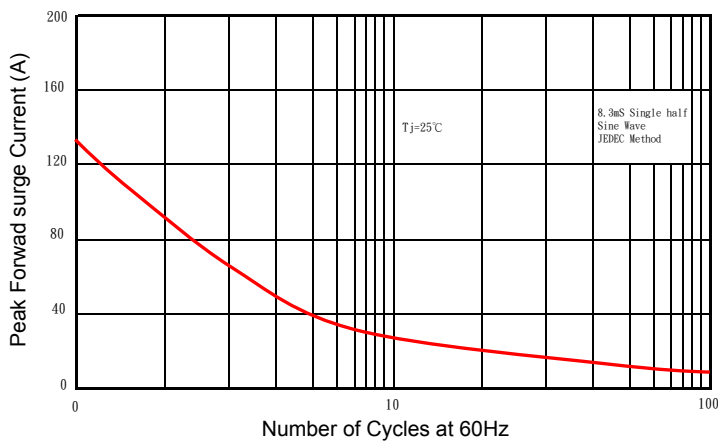

Typical Reverse Characteristic

