

RoHS Compliant Product  
A suffix of "-C" specifies halogen or lead -free

### DESCRIPTION

The TL432-C is a three-terminal Shunt Voltage Reference providing a highly accurate 1.24V. The TL432-C thermal stability and wide operating current, makes it suitable for all variety of applications that are looking for a low cost solution with high performance.

### FEATURES

- Low Dynamic Output Impedance
- Low Output Noise Voltage
- Fast Turn-on Response
- Sink Current Capability of 0.1mA~100mA
- The Effective Temperature Compensation in the Working Range of Full Temperature

### APPLICATIONS

- Shunt Regulator
- High-Current Shunt Regulator
- Precision Current Limiter

### MARKING



### PACKAGE INFORMATION

Package	MPQ	Leader Size
SOT-23	3K	7 inch


### ORDER INFORMATION

Part Number	Type
TL432-C	Lead (Pb)-free and Halogen-free


### ABSOLUTE MAXIMUM RATINGS

(Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Ratings	Unit
Cathode Voltage	$V_{KA}$	18	V
Cathode Current Range (Continuous)	$I_{KA}$	100	mA
Reference Input Current Range	$I_{ref}$	6	$\mu A$
Power Dissipation	$P_D$	350	mW
Thermal Resistance from Junction-Ambient	$R_{\theta JA}$	357	$^{\circ}C/W$
Operating Junction Temperature Range	$T_J$	-40~125	$^{\circ}C$
Storage Temperature Range	$T_{STG}$	-65~150	



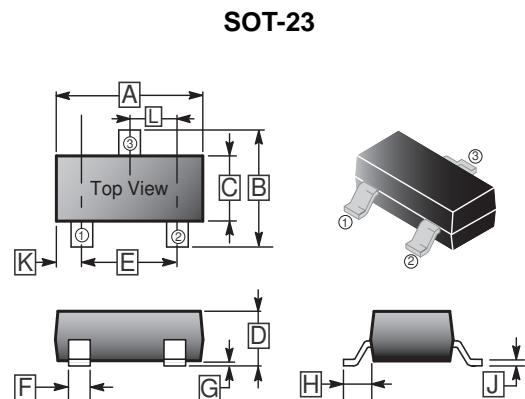


REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	2.70	3.10	G	0	0.18
B	2.10	2.95	H	0.55	REF.
C	1.20	1.70	J	0.08	0.20
D	0.89	1.30	K	0.60	REF.
E	1.70	2.30	L	0.95	BSC.
F	0.30	0.50			







**ELECTRICAL CHARACTERISTICS** ( $T_A=25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Reference Input Voltage (Fig.1)	$V_{\text{ref}}$	1.2214	-	1.2586	V	$V_{KA}=V_{\text{ref}}, I_{KA}=10\text{mA}$
Deviation of Reference Voltage Over Full Temperature Range (Fig.1)	$\Delta V_{\text{ref(DEV)}}$	-	-	16	mV	$V_{KA}=V_{\text{ref}}, I_{KA}=10\text{mA}$ $0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$
Ratio of Change in Reference Input Voltage to the Change in Cathode Voltage (Fig.2)	$\Delta V_{\text{ref}}/\Delta V_{KA}$	-	-	2.4	mV/V	$I_{KA}=10\text{mA},$ $\Delta V_{KA}=1.25\text{V}\sim15\text{V}$
Deviation of Reference Input Current Over Full Temperature Range (Fig.2)	$\Delta I_{\text{ref}}/\Delta T$	-	-	0.6	$\mu\text{A}$	$I_{KA}=10\text{mA}, R_1=10\text{K}\Omega, R_2=\infty$ $0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$
Minimum Cathode Current for Regulation (Fig.1)	$I_{KA(\min)}$	-	-	0.1	mA	$V_{KA}=V_{\text{ref}}$
Off-State Cathode Current (Fig.3)	$I_{KA(\text{OFF})}$	-	-	0.5	$\mu\text{A}$	$V_{KA}=15\text{V}, V_{\text{ref}}=0$
Dynamic Impedance	$Z_{KA}$	-	-	0.5	$\Omega$	$V_{KA}=V_{\text{ref}}, I_{KA}=0.1\sim20\text{mA},$ $f \leq 1\text{KHz}$

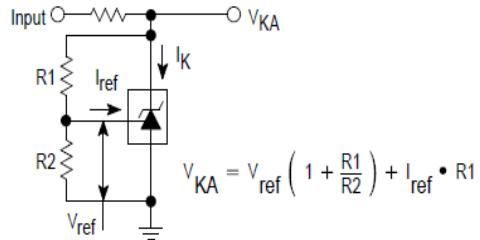**Figure 1. Test Circuit for  $V_{KA} = V_{\text{ref}}$** 

**Figure 2. Test Circuit for  $V_{KA} > V_{\text{ref}}$** 

**Figure 3. Test Circuit for  $I_{\text{off}}$** 

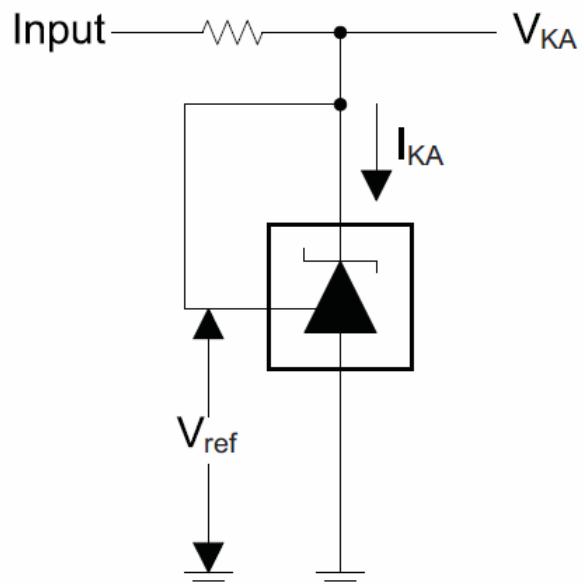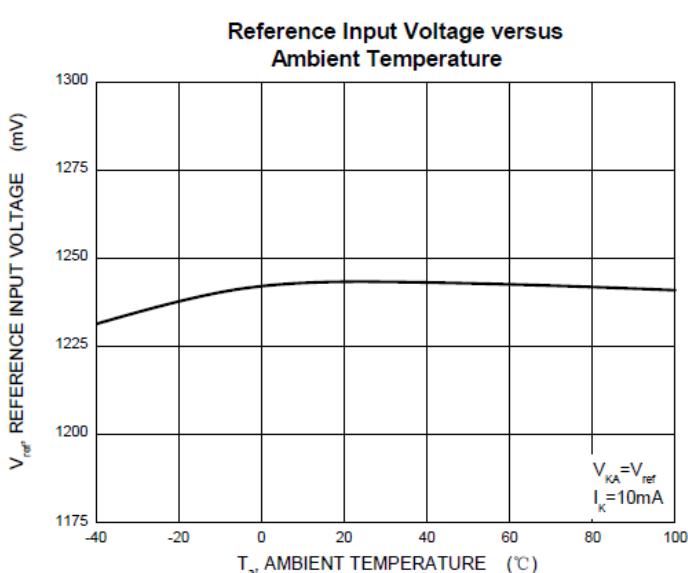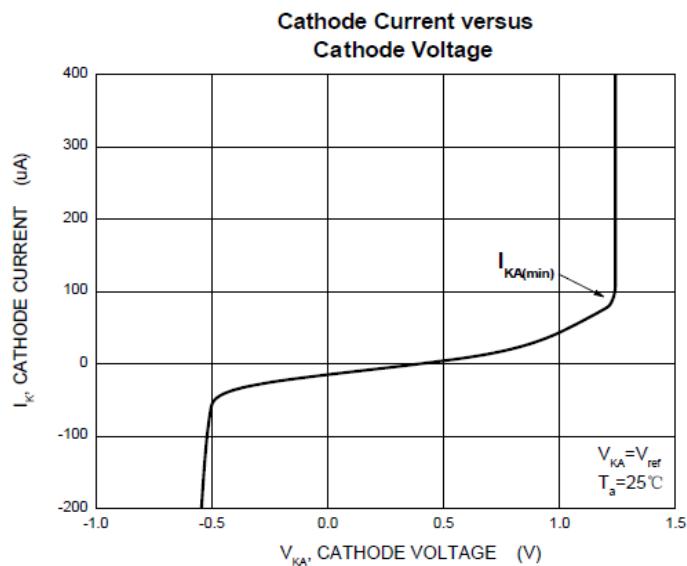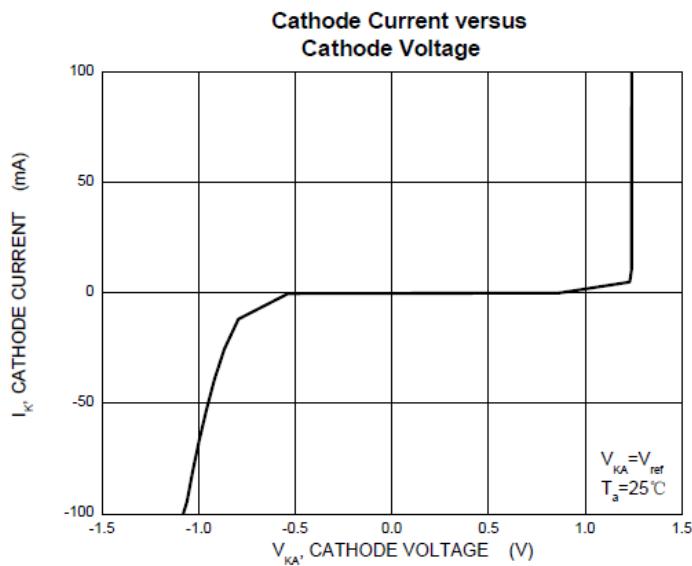**Note:**





- It is strongly recommended to connect a capacitor (value more than  $0.1\mu\text{F}$ ) at the output pin to smooth the output. The capacitor should be placed as close as possible to the output pin, with the shortest path to GND.

## CHARACTERISTIC CURVE




Test Circuit for  $V_{KA}=V_{ref}$


## CHARACTERISTIC CURVE

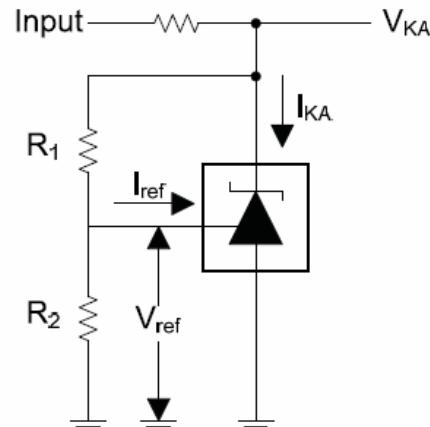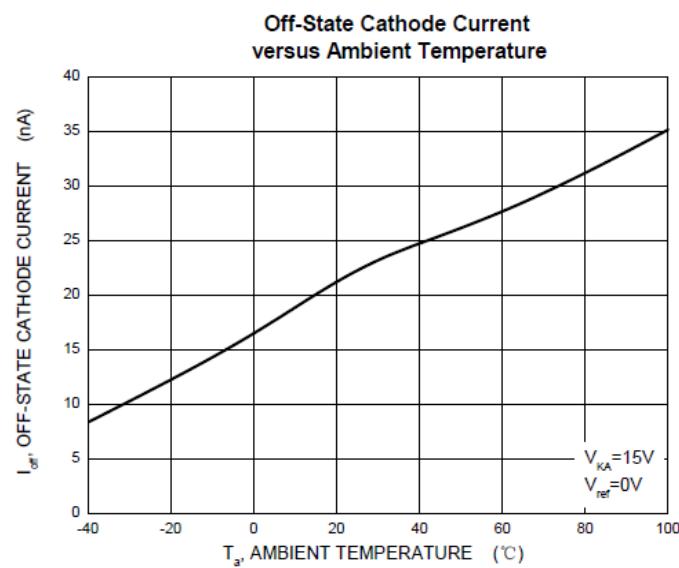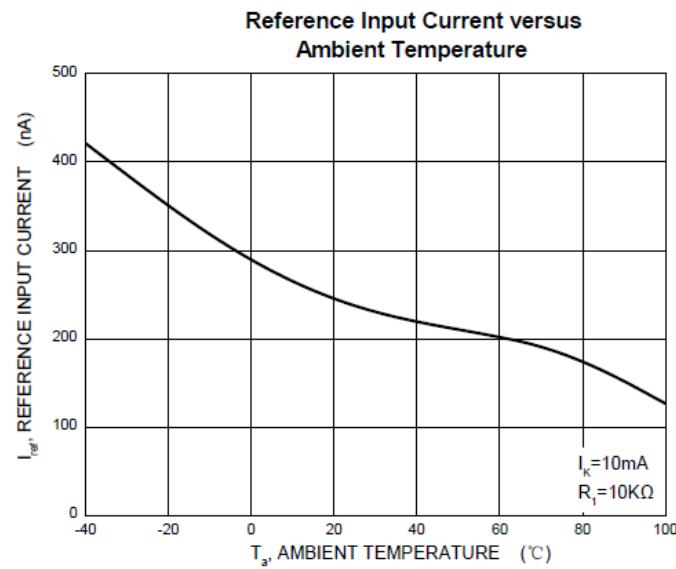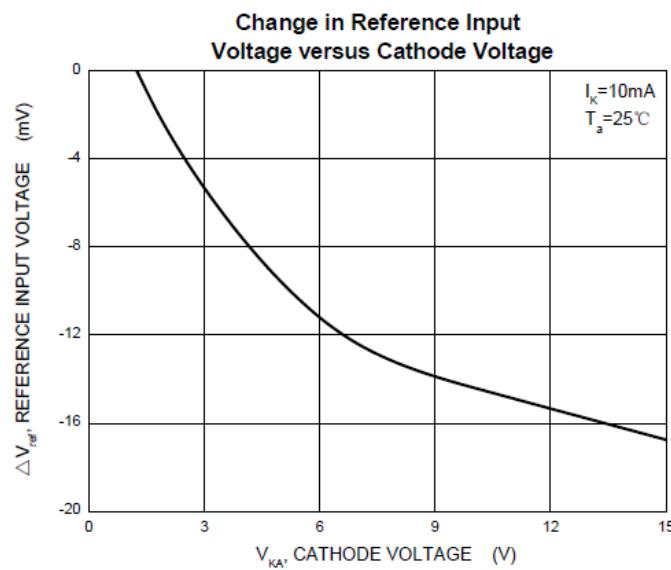

Test Circuit for  $V_{KA} = V_{ref}(1 + R_1/R_2) + R_1 * I_{ref}$

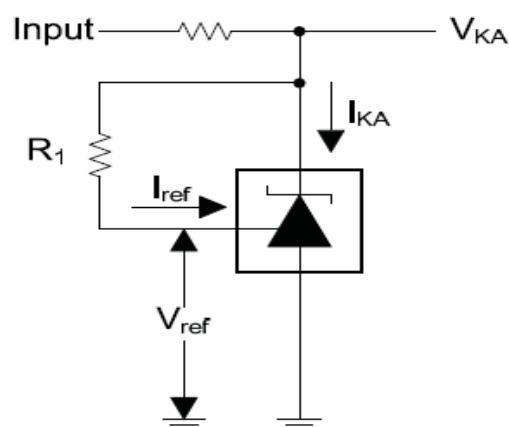

Test Circuit for  $I_{ref}$

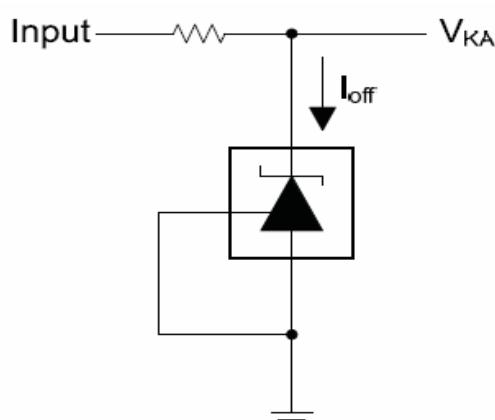

Test Circuit for  $I_{off}$