


RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free

FEATURES

- Low forward voltage drop
- High current capability
- High reliability
- High surge current capability
- Good for switching mode application

DO-27

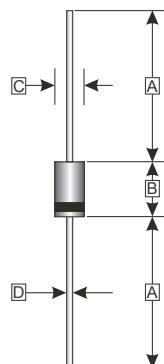

PACKAGING INFORMATION

- Case: Molded plastic
- Epoxy: UL 94V-0 rate flame retardant
- Lead: Axial leads, solderable per MIL-STD-202, method 208 guaranteed
- Polarity: Color band denotes cathode end
- Mounting position: Any
- Weight: 1.1050 grams (approximately)

REF.	Millimeter	
	Min.	Max.
A	25.4 (TYP)	
B	7.20	9.53
C	5.00	5.60
D	1.20	1.32

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.


Single phase half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

PARAMETERS	SYMBOL	PART NUMBERS					UNITS	TESTING CONDITIONS		
		SF31	SF32	SF33	SF34	SF35				
Recurrent Reverse Voltage (Max.)	V_{RRM}	50	100	200	400	600	V			
RMS Voltage (Max.)	V_{RMS}	35	70	140	280	420	V			
DC Blocking Voltage (Max.)	V_{DC}	50	100	200	400	600	V			
Instantaneous Forward Voltage (Max.)	V_F	0.95			1.30	1.70	V	$I_F = 1\text{ A}$		
Average Forward Rectified Current (Max.)	I_o	3.0				A	0.375" (9.5mm) lead length @ $T_A = 55^\circ\text{C}$			
Peak Forward Surge Current	I_{FSM}	75		50		A	8.3ms single half sine-wave superimposed on rated load (JEDEC method)			
DC Reverse Current (Max.)	I_R	5.0				μA	$V_R = V_{DC}, T_A=25^\circ\text{C}$			
		50					$V_R = V_{DC}, T_A=100^\circ\text{C}$			
Reverse Recovery Time (Max.)	T_{RR}	35			50	nS	$I_F=0.5\text{ A}, I_R=1.0\text{ A}, I_{RR}=0.25\text{ A}$			
Junction Capacitance (Typ.)	C_J	60				pF	f=1MHz and applied 4V DC reverse voltage			
Storage Temperature Range	T_{STG}	-65 ~ 150				°C				

RATINGS AND CHARACTERISTIC CURVES (SF31 THRU SF35)

FIG.1- TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

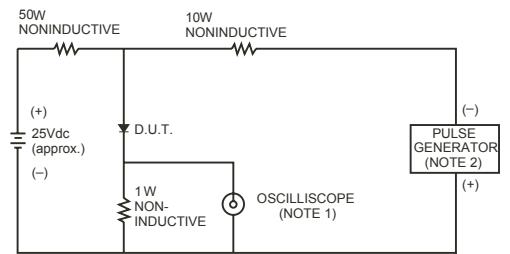

NOTES: 1. Rise Time= 7ns max., Input Impedance= 1 megohm. 22pF.

2. Rise Time= 10ns max., Source Impedance= 50 ohms.

FIG.2-TYPICAL FORWARD CURRENT DERATING CURVE

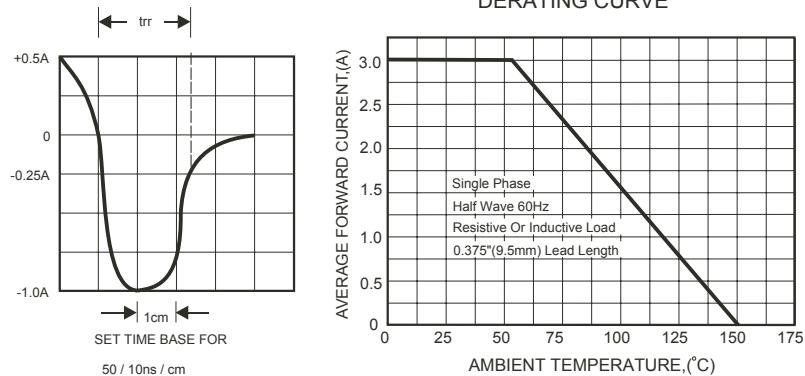


FIG.3-TYPICAL FORWARD CHARACTERISTICS

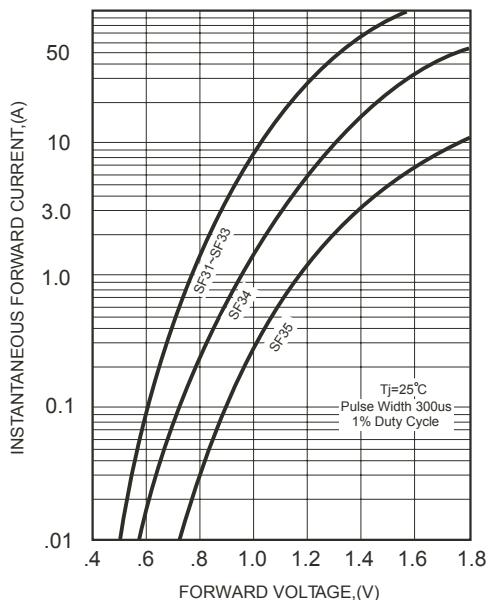


FIG.4-TYPICAL REVERSE CHARACTERISTICS

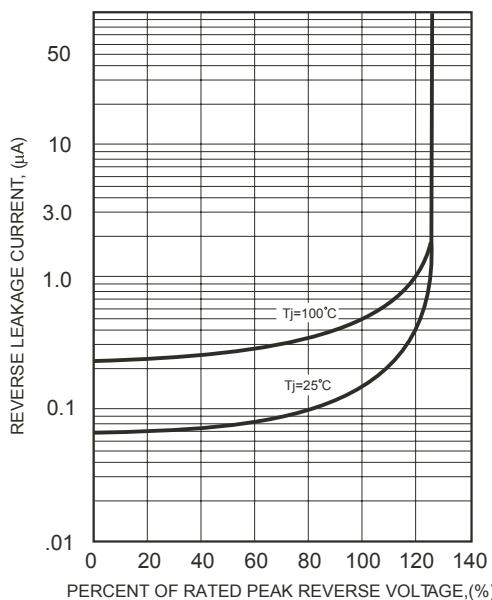


FIG.5-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

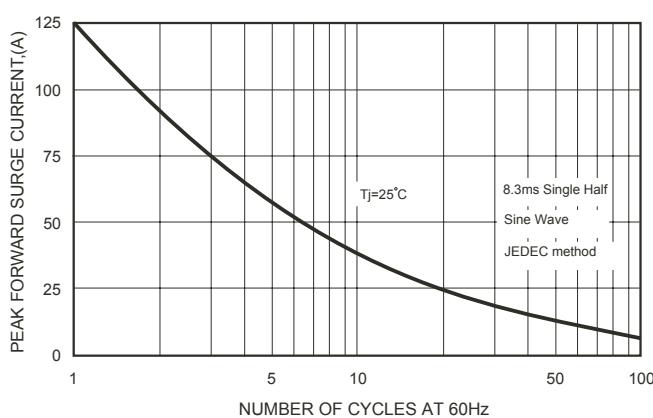


FIG.6-TYPICAL JUNCTION CAPACITANCE

