


RoHS Compliant Product
A suffix of "-C" specifies and halogen free

FEATURES


- Fast switching for high efficiency
- Low noise
- $T_{RR} = 35\text{ns}$
- Low reverse leakage current
- High voltage super FRD
- PFC application

MECHANICAL DATA

- Case : Molded plastic TO-220Y
- Epoxy : UL 94V-0 rate flame retardant
- Terminals : Solderable per MIL-STD-202 method 208
- Mounting position : Any
- Weight : 2.07 grams

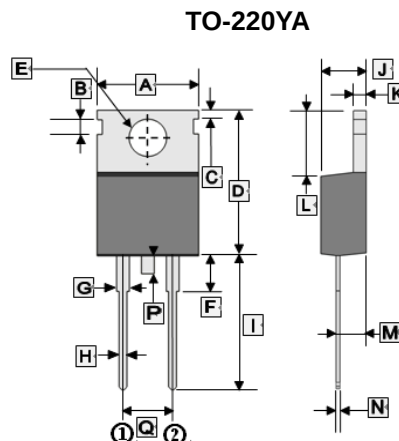

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	-	10.5	I	12.90	13.35
B	1.58	1.82	J	4.44	4.70
C	1.33	1.45	K	1.14	1.40
D	15.3	16.2	L	5.84	6.86
E	3.50	3.91	M	2.25	2.60
F	2.90	3.25	N	0.35	0.64
G	1.22	1.43	P	-	1.7
H	0.68	0.94	Q	4.95	5.20



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating at 25°C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, de-rate current by 20%.)

Parameter	Symbol	Rating	Unit
Recurrent Peak Reverse Voltage	V_{RRM}	1200	V
Maximum RMS Voltage	V_{RMS}	840	V
Maximum DC Blocking Voltage	V_{DC}	1200	V
Maximum Average Forward Rectified Current $T_C=140^\circ\text{C}$	$I_{F(AV)}$	8	A
Peak Forward Surge Current, 8.3ms single Half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	100	A
Maximum Instantaneous Forward Voltage @ 8.0A	V_F	3.2	V
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	100	μA
		500	
Maximum Reverse Recovery Time ¹	T_{RR}	35	nS
Typical Junction Capacitance ²	C_J	25	pF
Typical Thermal Resistance ³	$R_{\theta JC}$	2	$^\circ\text{C} / \text{W}$
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-65~175	$^\circ\text{C}$

Notes :

1. Reverse recovery test conditions $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $I_{RR} = 0.25\text{A}$.
2. Junction Capacitance test conditions : $V_R = 10\text{V}$, $I_F = 0\text{A}$
3. Thermal Resistance junction to case.

RATINGS AND CHARACTERISTICS CURVE

FIG.1 - FORWARD CURRENT DERATING CURVE

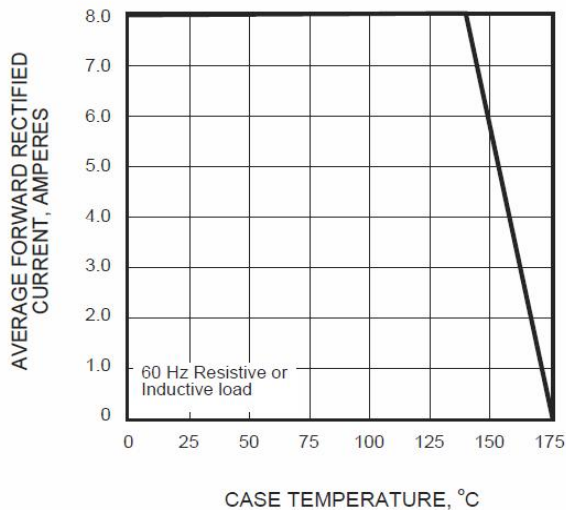


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

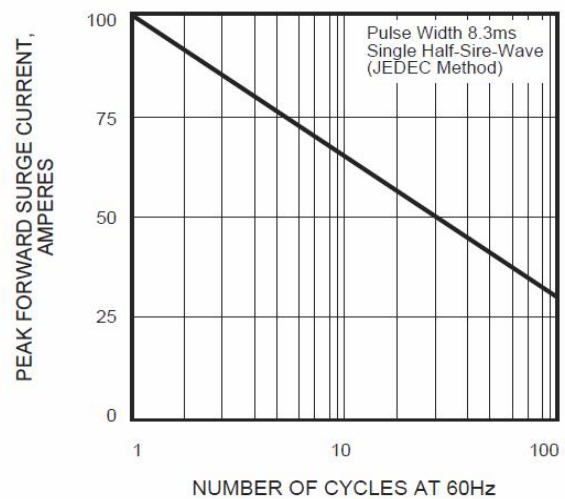


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

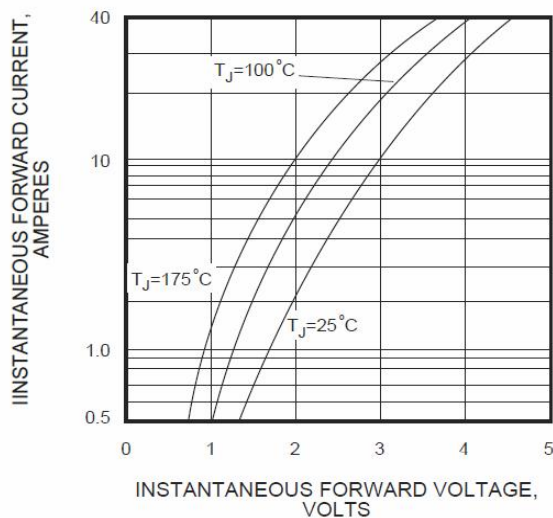


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

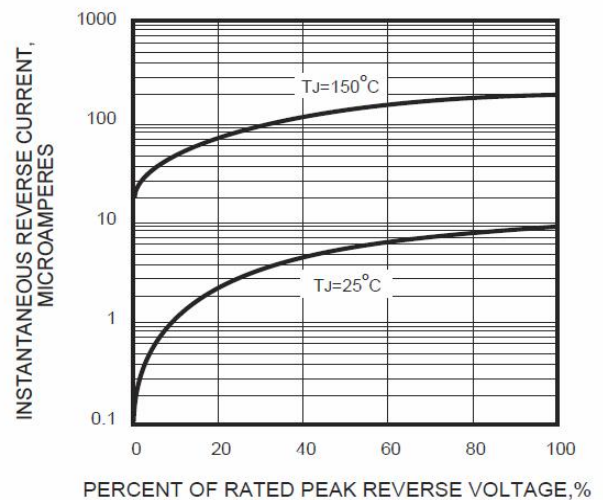


FIG.5 - TYPICAL JUNCTION CAPACITANCE

