

RoHS Compliant Product

A suffix of "-C" specifies halogen-free and lead-free


FEATURES

- Plastic package Underwriters Laboratory Flammability Classification 94V-0
- For surface mount application
- Glass passivated junction
- Low incremental surge resistance, Excellent clamping capability
- 600W peak pulse power capability with a 10/1000us waveform, repetition rate (duty cycle): 0.01%
- Very fast response time
- High temperature soldering guaranteed: 250°C / 10 seconds at terminals

MECHANICAL DATA

- Case: Molded plastic
- Lead: Solder plated, solderable per MIL-STD-750, Method 2026
- Polarity: For unidirectional types the band denotes the cathode, which is positive with respect to the anode under normal TVS operation

SMB

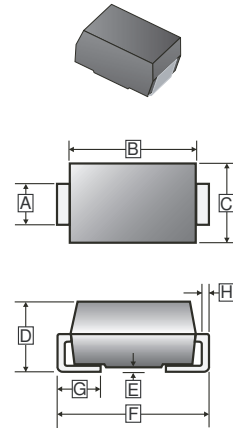

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	1.85	2.20	E	-	0.25
B	4.00	4.85	F	5.07	5.59
C	3.25	3.94	G	0.75	1.52
D	1.99	2.61	H	0.15	0.31

PACKAGE INFORMATION

Package	MPQ	Leader Size
SMB	3K	13 inch

ORDER INFORMATION

Part Number	Type
SMBJ Series-C	Lead (Pb)-free and Halogen-free

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load. For capacitive load, derate current by 20%.)

Rating	Symbol	Value	Unit
Minimum Peak Pulse Power Dissipation ^{1 2} @10/1000us waveform	P _{PP}	600	W
Minimum Peak Pulse Current ¹ @10/1000us waveform	I _{PP}	(See Next Table.)	A
Peak Forward Surge Current ² @8.3ms single half sine-wave for uni-directional only	I _{FSM}	100	A
Operating Junction & Storage Temperature Range	T _J , T _{STG}	-55 ~ 150	°C
Thermal Resistance Ratings			
Thermal Resistance Junction-Ambient	R _{θJA}	100	°C/W
Thermal Resistance Junction-Case	R _{θJC}	20	

Notes:

1. Non-repetitive current pulse, on Fig. 3 and derated above T_A=25°C per Fig. 2.
2. Mounted on 0.2 x 0.2" (0.5 x 0.5 mm) copper pads to each terminal.
3. Mounted on minimum recommended pad layout.

ELECTRICAL CHARACTERISTICS (Rating $T_A=25^{\circ}\text{C}$ unless otherwise specified)

Part Number		Reverse Stand-Off Voltage	Breakdown Voltage V_{BR} @ I_T		Test Current	Maximum Clamping Voltage V_C @ I_{PP}	Peak Pulse Current	Reverse Leakage I_R @ V_{RWM}
			Min	Max				
Directional		V_{RWM}	V_{BR}		I_T	V_C	I_{PP}	I_R
Uni	Bi	V	V	V	mA	V	A	μA
SMBJ5.0A-C	-	5	6.4	7.07	10	9.2	65.2	800
-	SMBJ5.0CA-C	5	6.4	7.25	10	9.2	65.2	800
SMBJ6.0A-C	SMBJ6.0CA-C	6	6.67	7.37	10	10.3	58.3	800
SMBJ6.5A-C	SMBJ6.5CA-C	6.5	7.22	7.98	10	11.2	53.6	500
SMBJ7.0A-C	SMBJ7.0CA-C	7	7.78	8.6	10	12.0	50	200
SMBJ7.5A-C	SMBJ7.5CA-C	7.5	8.33	9.21	1	12.9	46.5	100
SMBJ8.0A-C	SMBJ8.0CA-C	8	8.89	9.83	1	13.6	44.1	50
SMBJ8.5A-C	SMBJ8.5CA-C	8.5	9.44	10.4	1	14.4	41.7	20
SMBJ9.0A-C	SMBJ9.0CA-C	9	10.0	11.1	1	15.4	39.0	10
SMBJ10A-C	SMBJ10CA-C	10	11.1	12.3	1	17.0	35.3	5
SMBJ11A-C	SMBJ11CA-C	11	12.2	13.5	1	18.2	33.0	5
SMBJ12A-C	SMBJ12CA-C	12	13.3	14.7	1	19.9	30.2	5
SMBJ13A-C	SMBJ13CA-C	13	14.4	15.9	1	21.5	27.9	1
SMBJ14A-C	SMBJ14CA-C	14	15.6	17.2	1	23.2	25.9	1
SMBJ15A-C	SMBJ15CA-C	15	16.7	18.5	1	24.4	24.6	1
SMBJ16A-C	SMBJ16CA-C	16	17.8	19.7	1	26.0	23.1	1
SMBJ17A-C	SMBJ17CA-C	17	18.9	20.9	1	27.6	21.7	1
SMBJ18A-C	SMBJ18CA-C	18	20	22.1	1	29.2	20.5	1
SMBJ20A-C	SMBJ20CA-C	20	22.2	24.5	1	32.4	18.5	1
SMBJ22A-C	SMBJ22CA-C	22	24.4	26.9	1	35.5	16.9	1
SMBJ24A-C	SMBJ24CA-C	24	26.7	29.5	1	38.9	15.4	1
SMBJ26A-C	SMBJ26CA-C	26	28.9	31.9	1	42.1	14.3	1
SMBJ28A-C	SMBJ28CA-C	28	31.1	34.4	1	45.4	13.2	1
SMBJ30A-C	SMBJ30CA-C	30	33.3	36.8	1	48.4	12.4	1
SMBJ33A-C	SMBJ33CA-C	33	36.7	40.6	1	53.3	11.3	1
SMBJ36A-C	SMBJ36CA-C	36	40.0	44.2	1	58.1	10.3	1
SMBJ40A-C	SMBJ40CA-C	40	44.4	49.1	1	64.5	9.3	1
SMBJ43A-C	SMBJ43CA-C	43	47.8	52.8	1	69.4	8.6	1
SMBJ45A-C	SMBJ45CA-C	45	50.0	55.3	1	72.7	8.3	1
SMBJ48A-C	SMBJ48CA-C	48	53.3	58.9	1	77.4	7.8	1
SMBJ51A-C	SMBJ51CA-C	51	56.7	62.7	1	82.4	7.3	1
SMBJ54A-C	SMBJ54CA-C	54	60.0	66.3	1	87.1	6.9	1

ELECTRICAL CHARACTERISTICS (Rating $T_A=25^\circ\text{C}$ unless otherwise specified)

Part Number		Reverse Stand-Off Voltage	Breakdown Voltage V_{BR} @ I_T		Test Current	Maximum Clamping Voltage V_C @ I_{PP}	Peak Pulse Current	Reverse Leakage I_R @ V_{RWM}
			Min	Max				
Directional		V_{RWM}	V_{BR}		I_T	V_C	I_{PP}	I_R
Uni	Bi	V	V	V	mA	V	A	μA
SMBJ58A-C	SMBJ58CA-C	58	64.4	71.2	1	93.6	6.4	1
SMBJ60A-C	SMBJ60CA-C	60	66.7	73.7	1	96.8	6.2	1
SMBJ64A-C	SMBJ64CA-C	64	71.1	78.6	1	103	5.8	1
SMBJ70A-C	SMBJ70CA-C	70	77.8	86	1	113	5.3	1
SMBJ75A-C	SMBJ75CA-C	75	83.3	92.1	1	121	5.0	1
SMBJ78A-C	SMBJ78CA-C	78	86.7	95.8	1	126	4.8	1
SMBJ85A-C	SMBJ85CA-C	85	94.4	104	1	137	4.4	1
SMBJ90A-C	SMBJ90CA-C	90	100	111	1	146	4.1	1
SMBJ100A-C	SMBJ100CA-C	100	111	123	1	162	3.7	1
SMBJ110A-C	SMBJ110CA-C	110	122	135	1	177	3.4	1
SMBJ120A-C	SMBJ120CA-C	120	133	147	1	193	3.1	1
SMBJ130A-C	SMBJ130CA-C	130	144	159	1	209	2.9	1
SMBJ150A-C	SMBJ150CA-C	150	167	185	1	243	2.5	1
SMBJ160A-C	SMBJ160CA-C	160	178	197	1	259	2.3	1
SMBJ170A-C	SMBJ170CA-C	170	189	209	1	275	2.2	1
SMBJ180A-C	SMBJ180CA-C	180	201	222	1	292	2.1	1
SMBJ200A-C	SMBJ200CA-C	200	224	247	1	324	1.9	1
SMBJ220A-C	SMBJ220CA-C	220	246	272	1	356	1.7	1
SMBJ250A-C	SMBJ250CA-C	250	279	309	1	405	1.5	1
SMBJ300A-C	SMBJ300CA-C	300	335	371	1	486	1.3	1
SMBJ350A-C	SMBJ350CA-C	350	391	432	1	567	1.1	1
SMBJ400A-C	SMBJ400CA-C	400	447	494	1	648	0.9	1
SMBJ440A-C	SMBJ440CA-C	440	492	543	1	713	0.9	1

Notes:

1. $V_{(BR)}$ measured after I_T applied for 300us square wave pulse or equivalent.
2. Surge current waveform per Fig. 3 and derate per Fig. 2.
3. For Bi-directional types having V_{WM} of 10 Volts and less, the I_D limit is doubled.
4. All terms and symbols are consistent with ANSI/IEEE C62.35.

RATINGS AND CHARACTERISTIC CURVES

Fig. 1 – Peak Pulse Power Rating Curve

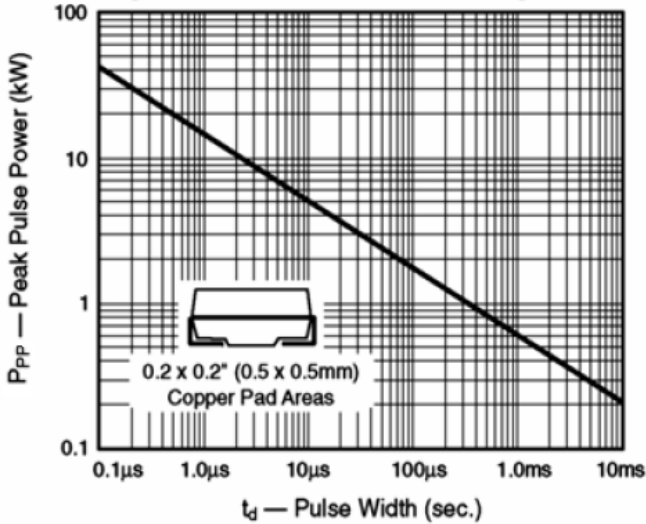


Fig. 2 – Pulse Derating Curve

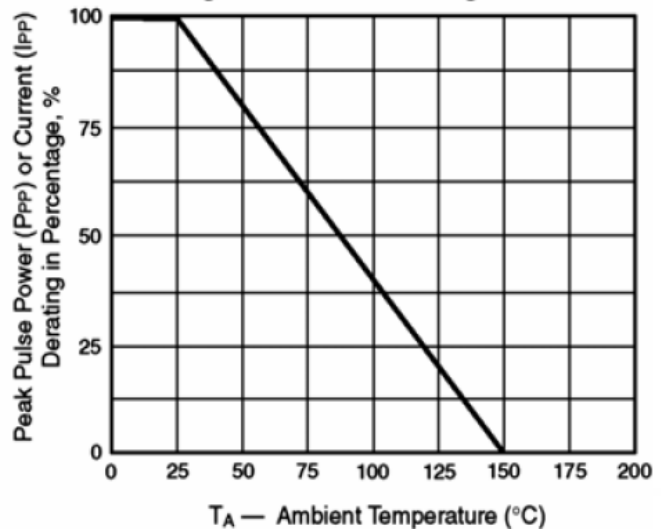


Fig. 3 – Pulse Waveform

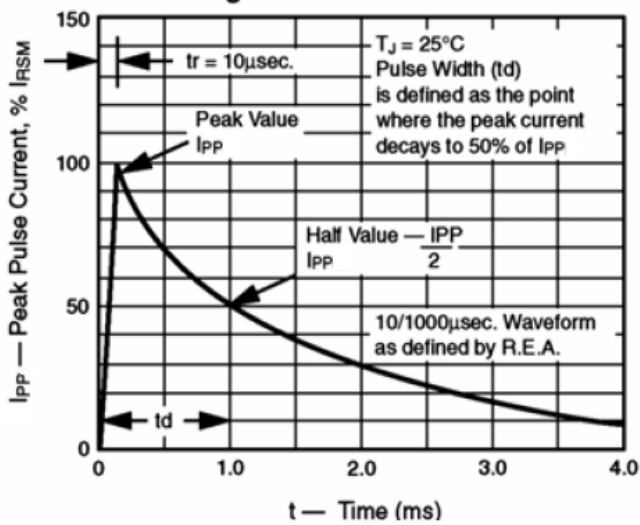


Fig. 4 – Typical Junction Capacitance

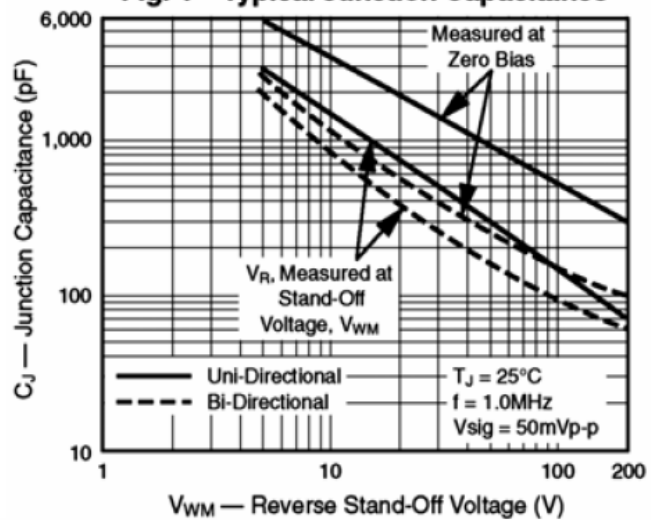


Fig. 5 – Typical Transient Thermal Impedance

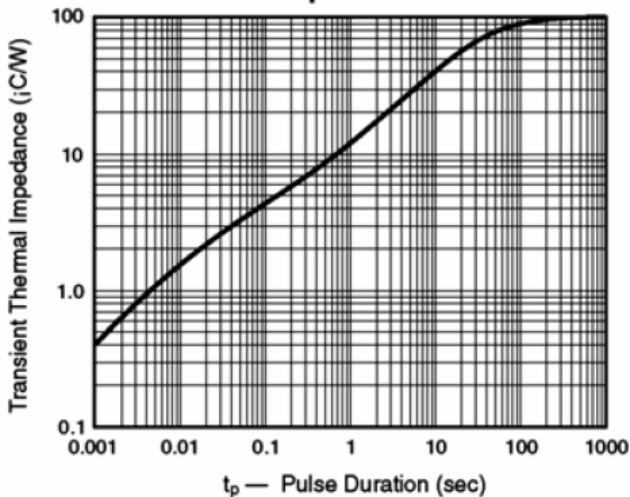


Fig. 6 – Maximum Non-Repetitive Peak Forward Surge Current

