

RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free

DESCRIPTION

Designed to protect voltage sensitive electronic components from ESD and other transients. Excellent clamping capability, low leakage, low capacitance, and fast response time provide best in class protection on designs that are exposed to ESD.

The combination of small size, low capacitance, and high level of ESD protection makes them a flexible solution for applications such as HDMI, Display Port TM, and MDDI interfaces. It is designed to replace multiplayer varistors (MLV) in consumer equipments applications such as mobile phone, notebook, PAD, STB, LCD TV etc.

FEATURES

- Bi-directional ESD protection of one line
- Reverse stand-off voltage: 3.3V
- Low leakage current
- Low reverse clamping voltage
- Fast response time
- JESD22-A114-B ESD Rating of class 3B per human body model
- IEC 61000-4-2 Level 4 ESD protection

MARKING



PACKAGE INFORMATION

Package	MPQ	Leader Size
DFNWB0603B	10K	7 inch


RDER INFORMATION

Part Number	Type
SUESDL3V3C-C	Lead (Pb)-free and Halogen-free

MAXIMUM RATINGS (T_A=25°C unless otherwise noted.)

Parameter	Symbol	Rating	Unit	
IEC 61000-4-2 ESD Voltage ¹	Air	±15	kV	
	Contact	±15		
	JESD22-A114-B ESD Voltage ¹	Per Human Body Model		±16
	ESD Voltage ¹	Per Machine Model		±0.4
Peak Pulsed Power ²	P _{PP}	24	W	
Peak Pulsed Current ²	I _{PP}	4	A	
Maximum Lead Solder Temperature @10 Second Duration	T _L	260	°C	
Junction & Storage Temperature Range	T _J , T _{STG}	150, -55~150	°C	

DFNWB0603B

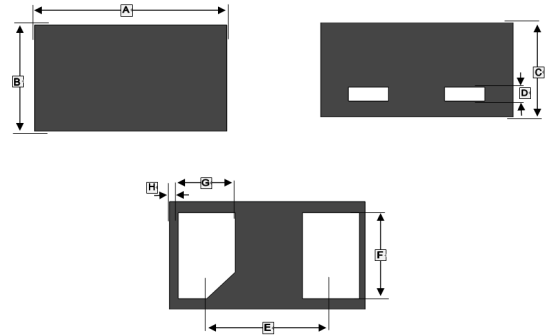

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	0.55	0.67	E	0.36	REF.
B	0.25	0.37	F	0.20	0.35
C	0.27	0.34	G	0.12	0.24
D	0.05 REF.		H	0.03 REF.	



ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise noted.)


Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Reverse Stand-off Voltage	V_{RWM}	-	-	3.3	V	
Breakdown Voltage	$V_{(BR)}$	7	11	-	V	$I_T=1\text{mA}$
Reverse Leakage Current	I_R	-	-	0.1	μA	$V_{RWM}=3.3\text{V}$
Clamping Voltage ²	V_C	-	6	-	V	$I_{PP}=4\text{A}$
Junction Capacitance	C_J	-	0.4	-	pF	$V_R=0\text{V}$, $f=1\text{MHz}$

Notes:

1. Device stressed with ten non-repetitive ESD pulses.
2. Non-repetitive current pulse 8/20 μs exponential decay waveform according to IEC61000-4-5.

ELECTRICAL PARAMETER

Symbol	Parameter
V_C	Clamping Voltage @ I_{PP}
I_{PP}	Peak Pulse Current
V_{BR}	Breakdown Voltage @ I_{BR}
I_{BR}	Test Current
I_R	Reverse Leakage Current @ V_{RWM}
V_{RWM}	Reverse Standoff Voltage

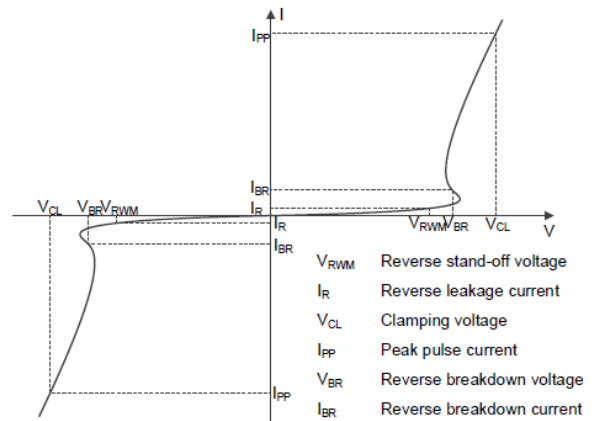

V-I characteristics for a Bi-directional TVS


ESD STANDARDS COMPLIANCE

IEC61000-4-2 Standard


Contact Discharge		Air Discharge	
Level	Test Voltage kV	Level	Test Voltage kV
1	2	1	2
2	4	2	4
3	6	3	8
4	8	4	15

JESD22-A114-B Standard

ESD Class	Human Body Discharge V
0	0~249
1A	250~499
1B	500~999
1C	1000~1999
2	2000~3999
3A	4000~7999
3B	8000~15999

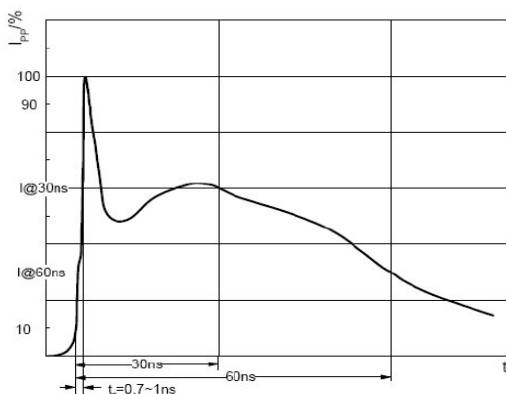


ESD pulse waveform according to IEC61000-4-2

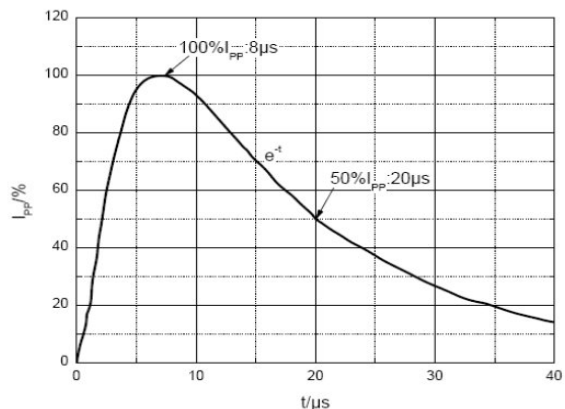


8/20 μs pulse waveform according to IEC 61000-4-5

CHARACTERISTICS CURVES


Reverse Characteristics

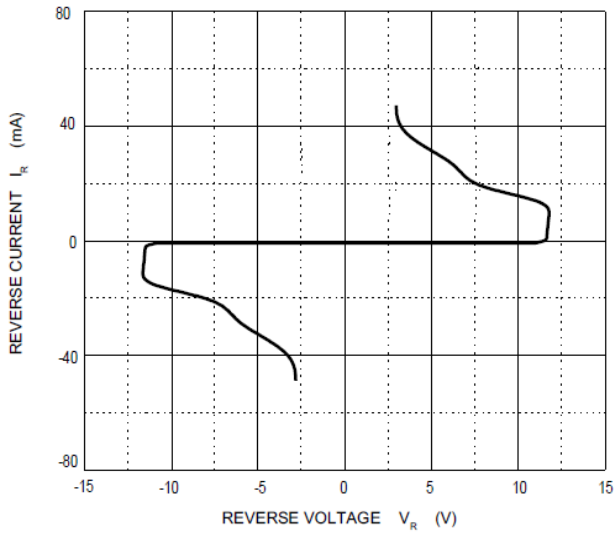


Capacitance Characteristics

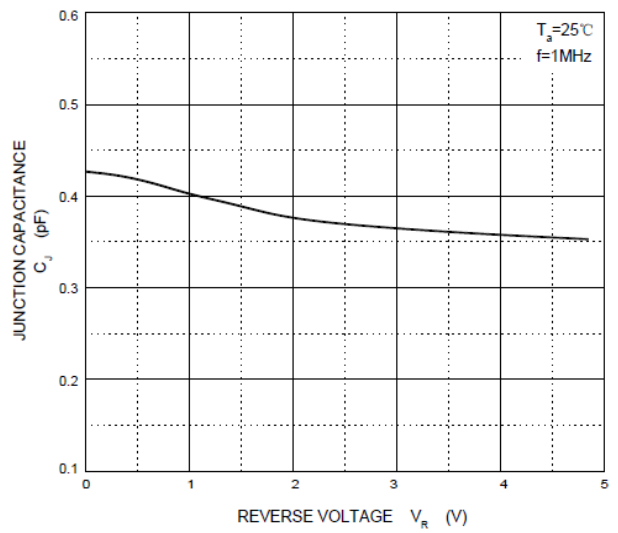

V_C --- I_{PP}

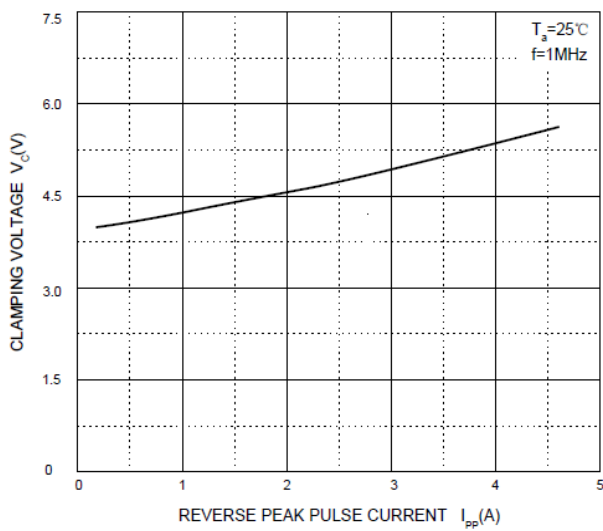

Mounting Pad Layout

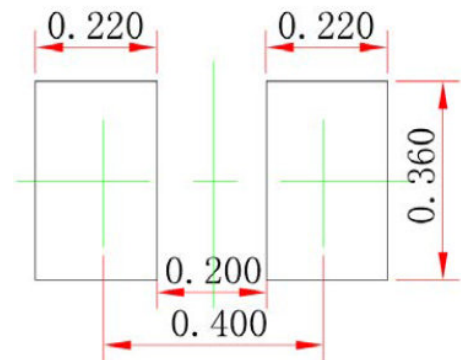

*Dimensions in millimeters