

RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free



FEATURES

- I_o : 6A
- V_{RRM} : 50~1000V
- Glass passivated chip
- High surge forward current capability
- Solder dip 275°C max.7s, per JESD 22-B106

MECHANICAL DATE

- Molding compound meets UL 94 -0 Flammability rating, RoHS compliant
- Terminals: Tin plated leads, solderable per J-STD-002 and JEES22-B102
- Polarity: As marked on body

4KBJ

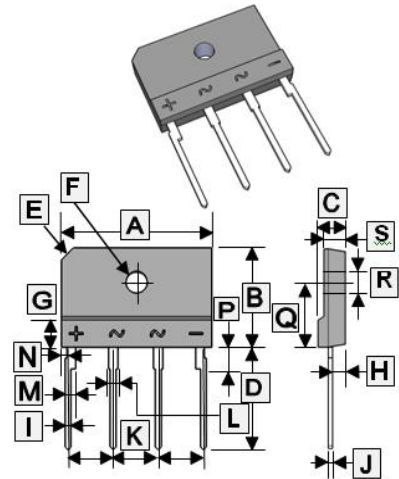

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	24.7	25.3	J	0.6	0.8
B	14.7	15.3	K	7.3	7.7
C	4.4	4.8	L	1.7	2.1
D	17.0	18.0	M	2.0 TYP.	
E	3.0 x 45°		N	1.05	1.45
F	3.1	3.4	P	3.3	3.8
G	4.0		Q	9.5	10.1
H	3.2	3.4	R	3.1	3.4
I	0.9	1.1	S	3.4	3.8

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, de-rate current by 20%.)

Parameter	Symbol	Part Number							Unit
		KBJ 6005	KBJ 601	KBJ 602	KBJ 604	KBJ 606	KBJ 608	KBJ 610	
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Average Rectified Output Current@60Hz sine wave, R-load	With heatsink, $T_C=110^\circ\text{C}$	6							A
	Without heatsink, $T_A=25^\circ\text{C}$	2.8							
Surge (Non-repetitive) Forward Current@ 60Hz sine wave, 1 cycle, $T_J=25^\circ\text{C}$	I_{FSM}	150							A
Current Squared Time@ $1\text{ms} \leq t < 8.3\text{ms}$, $T_J=25^\circ\text{C}$, Rating of per diode	I^2t	93.3							A ² S
Dielectric Strength @Terminals to case,	V_{DIS}	2							KV
Mounting Torque @Recommend torque: 5kg · cm	Tor	8							Kg · cm
Peak Forward Voltage @ $I_{FM}=3\text{A}$, Pulse measurement, Rating of per diode	V_{FM}	1							V
Peak Reverse Current @ $V_{RM}=V_{RRM}$, Pulse measurement, Rating of per diode	I_{RRM}	5							μA
Thermal Resistance	Without heatsink	$R_{\theta JA}$							°C / W
	With heatsink	$R_{\theta JC}$							
Junction and Storage temperature range	T_J, T_{STG}	-55~150							°C

RATINGS AND CHARACTERISTIC CURVES

FIG1: I_o - T_c Curve

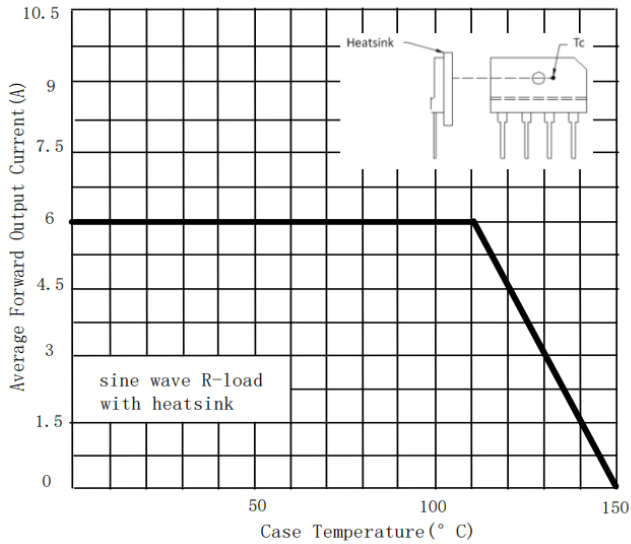


FIG2: Surge Forward Current Capability

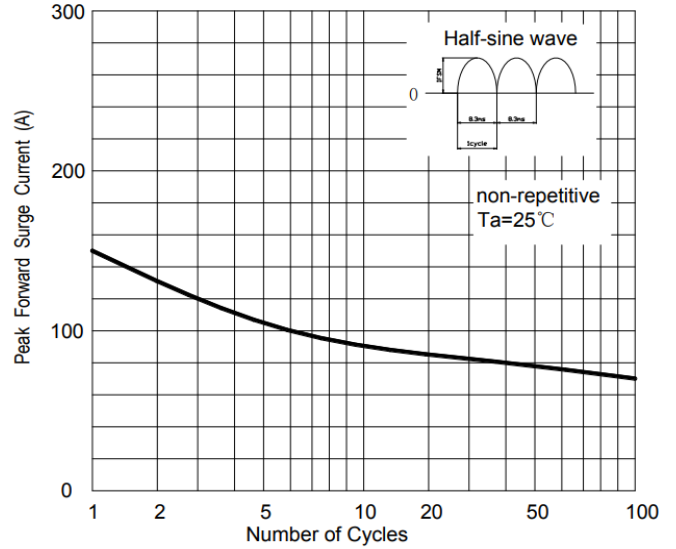


FIG3: Instantaneous Forward Voltage

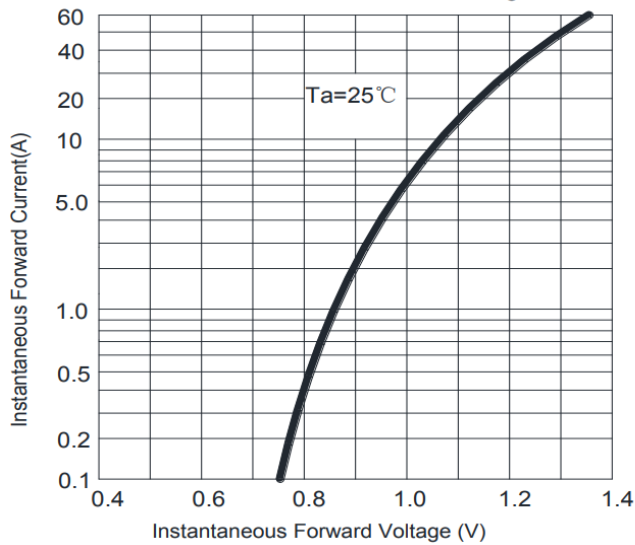


FIG4: Typical Reverse Characteristics

