

RoHS Compliant Product  
A suffix of "-C" specifies halogen & lead-free


## FEATURES

- High Current Capability
- Extremely Low Thermal Resistance
- For Surface Mount Application
- Higher Temp Soldering : 250°C for 10 Seconds at Terminals
- Low Reverse Current

## MECHANICAL DATA

- Case: Molded Plastic
- Epoxy: UL 94V-0 Rate Flame Retardant
- Lead: Axial Leads, Solderable per MIL-STD-202 method 208 Guaranteed
- Polarity: Color Band Denotes Cathode End
- Mounting Position: Any

### SMC

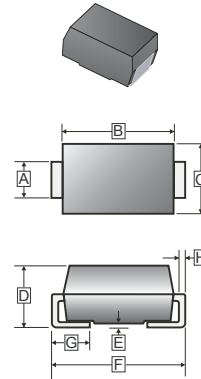

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	2.75	3.15	E	-	0.203
B	6.60	7.11	F	7.75	8.13
C	5.59	6.22	G	0.76	1.27
D	2.00	2.62	H	0.15	0.31

## PACKAGE INFORMATION

Package	MPQ	Leader Size
SMC	3K	13' inch

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(Rating 25°C ambient temperature unless otherwise specified. Single phase half wave, 60Hz, resistive or inductive load.  
For capacitive load, de-rate current by 20%.)


Parameter	Symbol	Rating	Unit
Peak Repetitive Peak reverse voltage	$V_{RRM}$	200	V
Working Peak Reverse Voltage	$V_{RWM}$	200	V
Maximum DC Blocking Voltage	$V_R$	200	V
Average Forward Current @ $T_J=25^\circ\text{C}$	$I_{F(AV)}$	3	A
Peak Forward Current @ 8.3 ms Half Sine	$I_{FSM}$	90	A
Maximum Instantaneous Forward Voltage	$V_F$	$I_{FM} = 3.0 \text{ A}, T_A = 25^\circ\text{C}$	0.85
		$I_{FM} = 3.0 \text{ A}, T_A = 75^\circ\text{C}$	0.75
		$I_{FM} = 3.0 \text{ A}, T_A = 125^\circ\text{C}$	0.68
Maximum DC Reverse Current At Rated DC Blocking Voltage <sup>4</sup>	$I_R$	$T_J = 25^\circ\text{C}$	5
		$T_J = 100^\circ\text{C}$	80
Typical Junction Capacitance <sup>1</sup>	$C_J$	60	pF
Voltage Rate of Change (Rated VR)	$dv/dt$	10000	V / $\mu\text{S}$
Typical Thermal Resistance <sup>2</sup>	$R_{\theta JL}$	20	$^\circ\text{C} / \text{W}$
Typical Thermal Resistance <sup>3</sup>	$R_{\theta JC}$	25	$^\circ\text{C} / \text{W}$
Operating Temperature Range	$T_J$	-50~150	$^\circ\text{C}$
Storage temperature	$T_{STG}$	-50~150	$^\circ\text{C}$

Notes:


1. Measured at 1MHz and applied reverse voltage of 5.0 V D.C.
2. Thermal Resistance Junction to Lead.
3. Thermal Resistance Junction to Case.
4. Pulse test: 300 $\mu\text{s}$  pulse width, 1% duty cycle.

**RATINGS AND CHARACTERISTIC CURVES**


Typical Forward Current Derating Curve

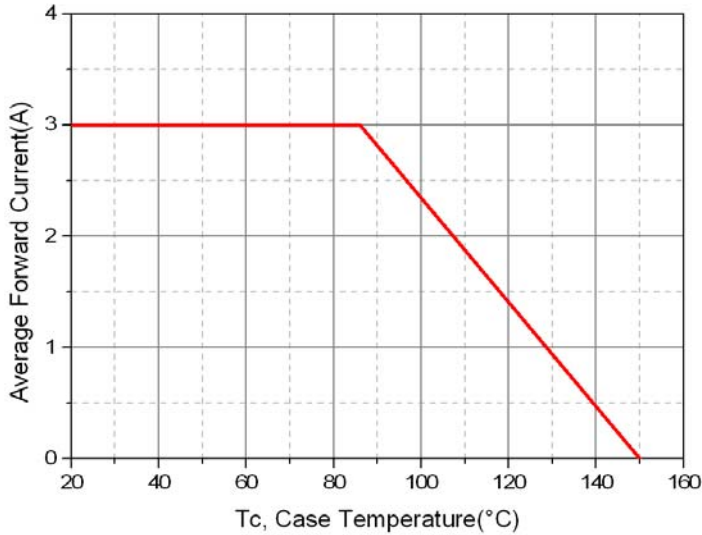


Typical Forward Characteristic

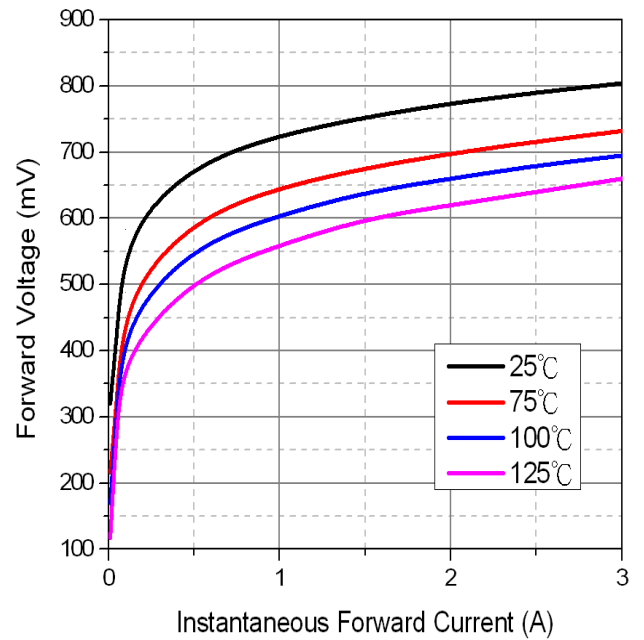

Maximum Non-Repetitive Forward Surge Current

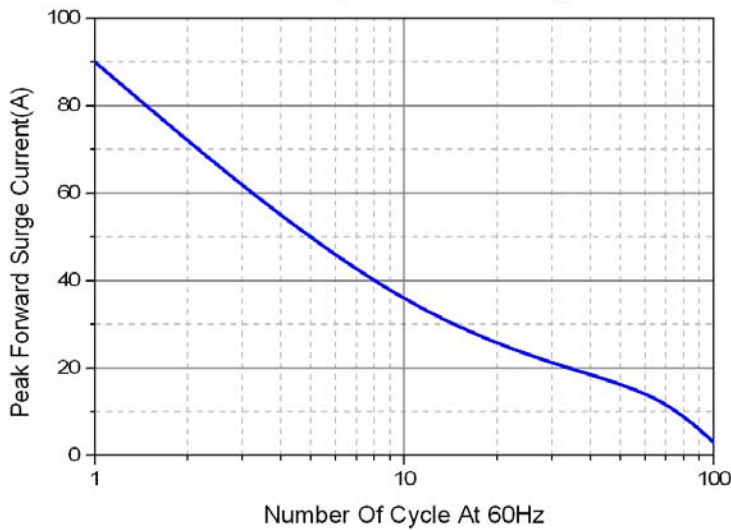

Typical Reverse Characteristic

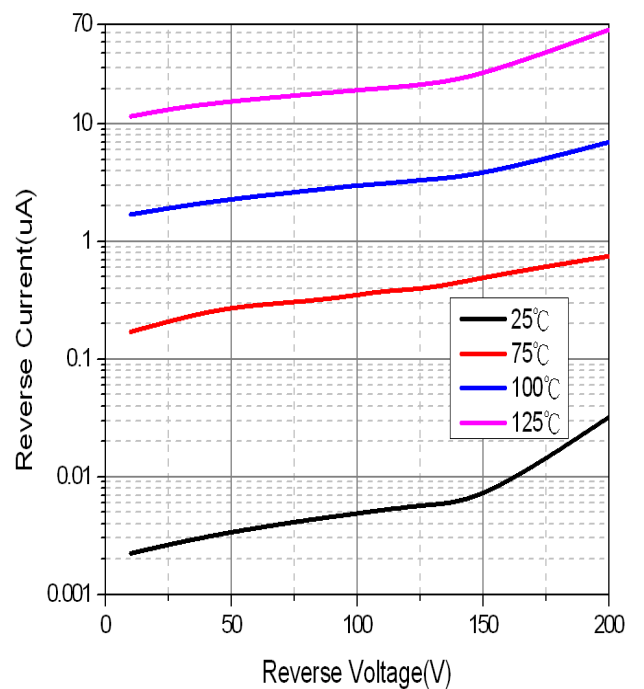

Typical Junction Capacitance

