


RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free

DESCRIPTION


- . Designed to protect voltage sensitive components from ESD.
- . Excellent clamping capability, low leakage and fast response.
- . Cellular phones, MP3 players, digital cameras ... etc.
- . Suitable for electronics where board space is a major design consideration.

SOD-523



FEATURES


- . Response time is typically < 1 ns
- . Low leakage
- . Stand-off voltage: 5.0V
- . ESD rating of class 3 (> 16 kV) per human body model
- . IEC61000-4-2 level 4 ESD protection

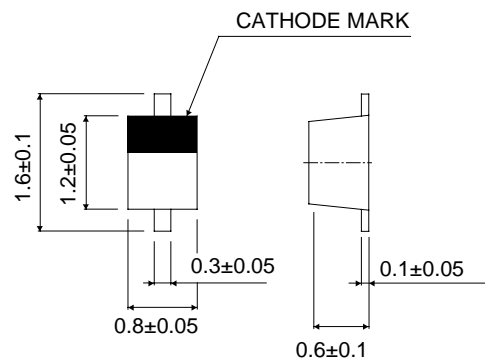

Dimensions in millimeters

MARKING CODE

ZF



MAXIMUM RATINGS

Rating 25°C ambient temperature unless otherwise specified.

TYPE NUMBER	SYMBOL	LIMITS	UNITS
IEC61000-4-2 (ESD) Air Contact		+/- 30 +/- 30	kV
ESD Voltage per human body model per machine model	V_{ESD}	16 400	kV V
Lead Solder Temperature - Max. (10 sec duration)	T_L	260	°C
Thermal Resistance Junction-to-ambient	$R_{\theta JA}$	625	°C/W
Junction and Storage Temperature Range	T_J, T_{STG}	-55 ~ +150	°C
Total Power Dissipation on FR-5 board (Note 1)	P_D	200	mW

Stresses exceeding "Maximum Ratings" may damage the device. "Maximum Ratings" are stress ratings only. Functional operation above the recommended. Operating conditions is not implied. Extended exposure to stresses above the recommended operating conditions may affect device reliability.

1. FR-5 = 1.0 x 0.75 x 0.62 in.

ELECTRICAL CHARACTERISTICS (T = 25 °C unless otherwise noted, V_F = 0.9V Max. @ I_F = 10mA for all types)

TYPE NUMBER	SYMBOL	Min.	Typ.	Max.	UNIT	TEST CONDITIONS
Reverse Stand-Off Voltage	V _{RWM}	-	-	5.0	V	
Reverse Leakage Current	I _R	-	-	0.08	μA	V _{RWM} = 5.0 V
Clamping Voltage	V _C	-	-	11.6	V	I _{PP} = 5 A
Peak Pulse Current	I _{PP}	-	-	9.4	A	(surge charge waveform per Figure 2.)
Clamping Voltage	V _C	-	-	18.6	V	I _{PP} = 9.4 A (surge charge waveform per Figure 2.)
Reverse Breakdown Voltage	V _{BR}	6.2	-	-	V	I _T = 1mA, T _{AMBIENT} = 25 °C
Test Current	I _T	-	1.0	-	mA	
Junction Capacitance	C	-	80	-	pF	
Peak Power Dissipation	P _{PK}	-	-	174	W	(surge charge waveform per Figure 2.)

ELECTRICAL CHARACTERISTIC CURVES

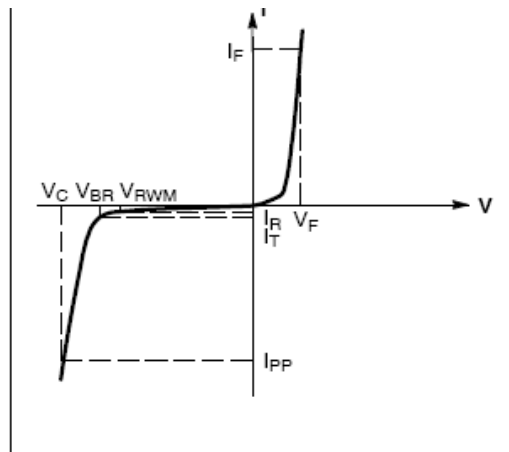


Figure 1. Uni-Directional TVS

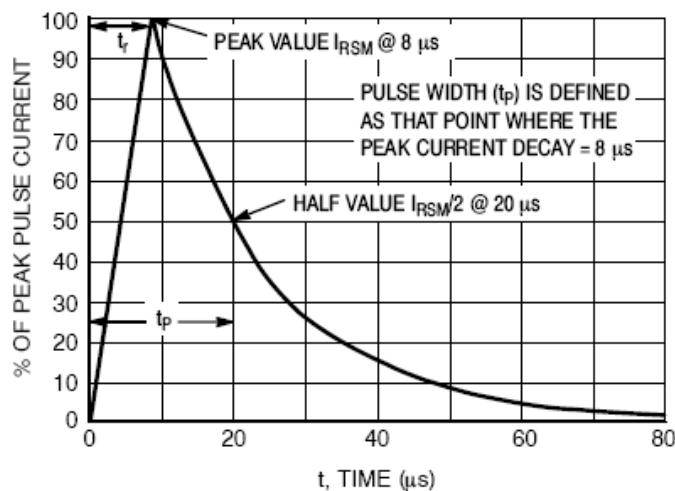


Figure 2. 8 x 20 μs Pulse Waveform